

SPECIFICATION



Current rating: 1A Max.
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -55°C ~ +105°C

MATERIAL

Insulator: PBT , UL94V-0
 Contact Pin: Brass , Contact area 0.8u" min,
 Gold plated over 40u" Nickel min.
 Solder area 80u"min, Tin plated over 40u" Nickel min.

ORDER INFORMATION

5 U S 2 A 1 8 S M - 1 0 4 S 0 X L X C 1

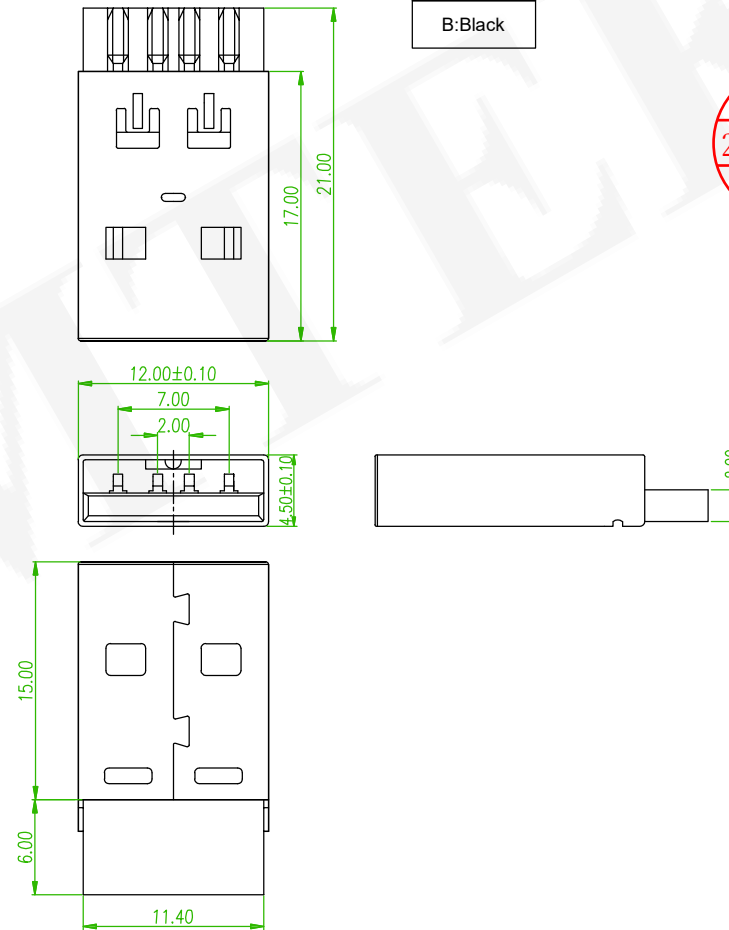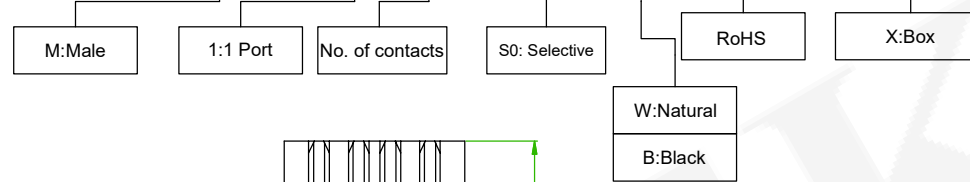

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	USB2.0 4PIN Solder Male				頁數 Page	1/1
	品號 PART NO.	5US2A18SM-104S0XLXC1				繪圖 DRAWN	Benson 2020/11/27
	圖號 DRAWING NO.	GW062-BN384	版本 REV.	A	核對 CHECKED	Josh 2020/11/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/11/27	
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE