

SPECIFICATION

Current Rating: 1.5A

Voltage Rating: 30V DC

Insulation Resistance: 1000M Ω Min.

Contact Resistance: 30m Ω Max.

Dielectric Withstanding Voltage: 500V AC At Sea level

MECHANICAL

Mating Force: 3.57kgf Max.

Unmating Force: 1.02kgf Min.



MATERIAL

Insulator: PBT, UL94V-0




Contact Pin: Brass

Shell: Brass

ORDER INFORMATION

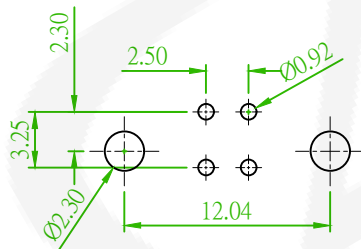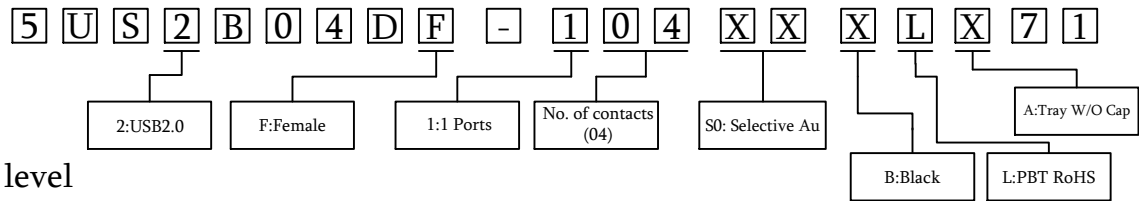

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

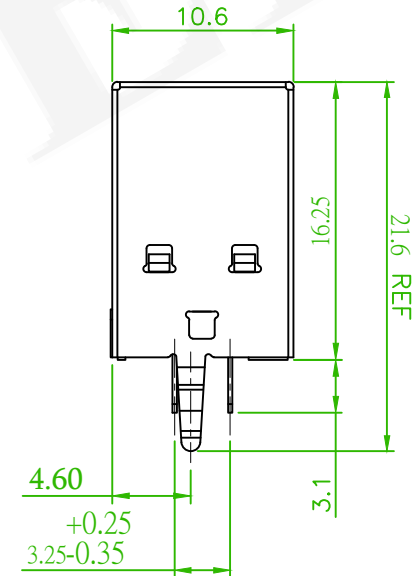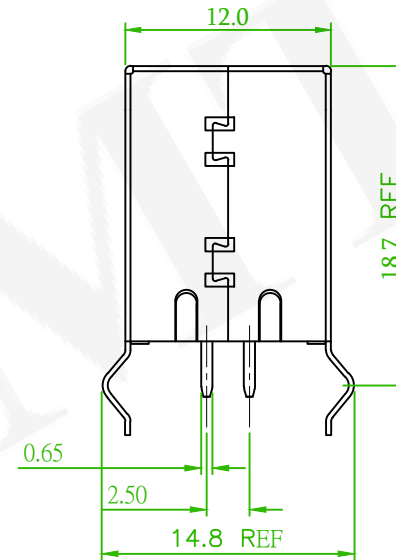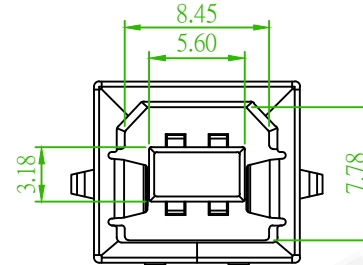

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	USB B TYPE FEMALE DIP 180°				頁數 Page	1/1
	品號 PART NO.	5US2B04DF-104XXXLX71				繪圖 DRAWN	Rex 2023/06/08
	圖號 DRAWING NO.	GW054-RE316	版本 REV.	A	核對 CHECKED	Josh 2023/06/08	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2023/06/08	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE