

SPECIFICATION





Current Rating: 5 AMP for VBUS Pin,
1.25 AMP for VCONN Pin
Insulation Resistance: 100MΩ Min.
Contact Resistance: 40mΩ Max.
Dielectric Voltage: 100V AC for one minute
Insertion Force: 5N to 20N
Withdrawal Force: 8N to 20N
Operating Temperature: -25°C to +85°C

MATERIAL


Insulator: Hi-Temp. Thermoplastic, UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION




5 U S 4 C 0 1 T M - 1 2 4 X X B U H C X

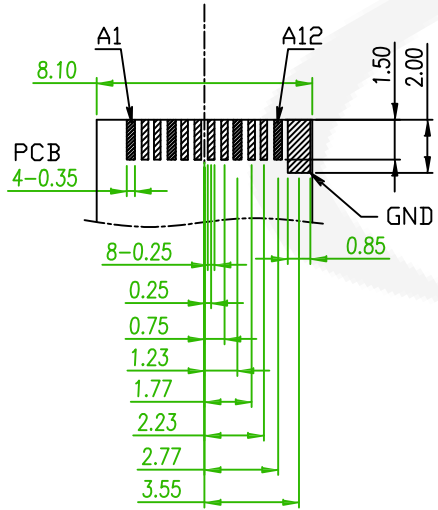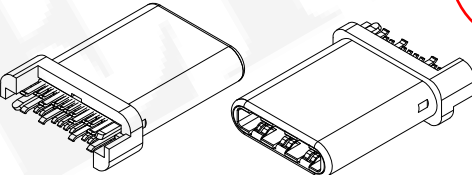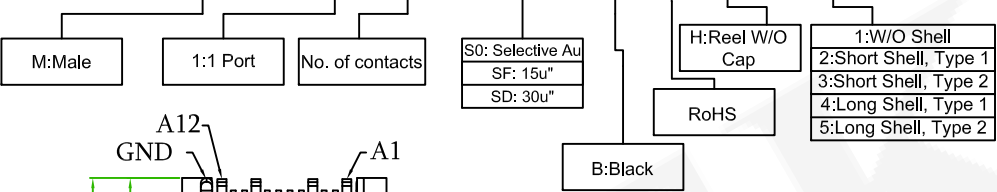

TOP

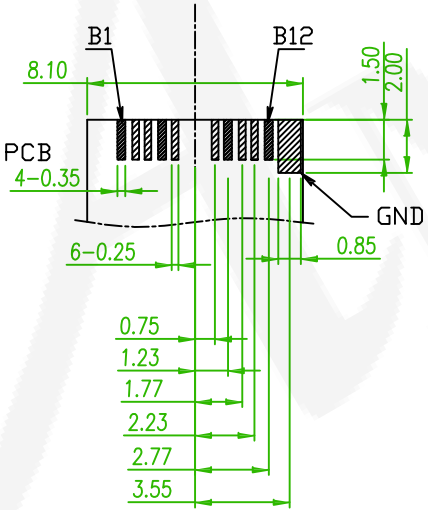


BOTTOM

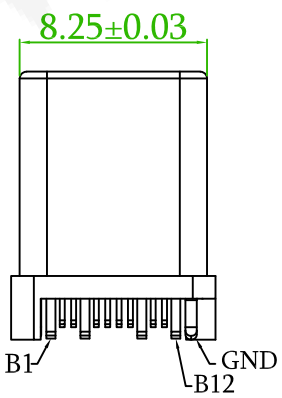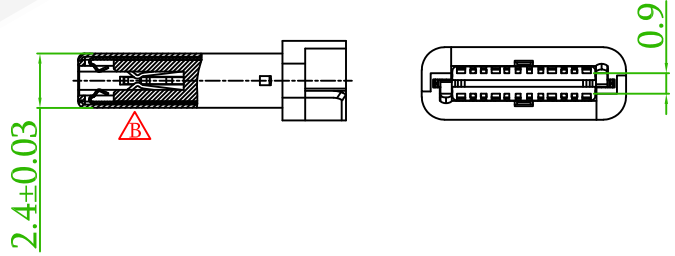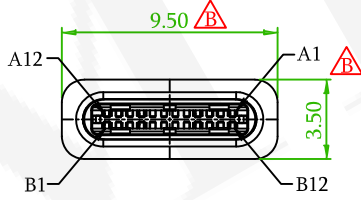


P.C.B. LAYOUT
TOLERANCE: ±0.1

REV.	ECN NO. OR DESCRIPTION	REVISION	DATE
△x5	QEC190702:Revise the DIM,Revise the Drawing,Revise the Layout	Nick	2019/07/30


 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	USB3.1-C TYPE MALE 180°				頁數 Page	1/2
	品號 PART NO.	5US4C01TM-124XXBUHCX				繪圖 DRAWN	Gary 2017/08/04
	圖號 DRAWING NO.	GW062-GA513		版本 REV.	B	核對 CHECKED	Carol 2017/08/04
	客戶品號 CUSTOMER P/N			比例 SCALE	1:1	承認 APPROVED	Jason 2017/08/04
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20		單位 UNIT	mm	THIRD ANGLE PROJECTION	

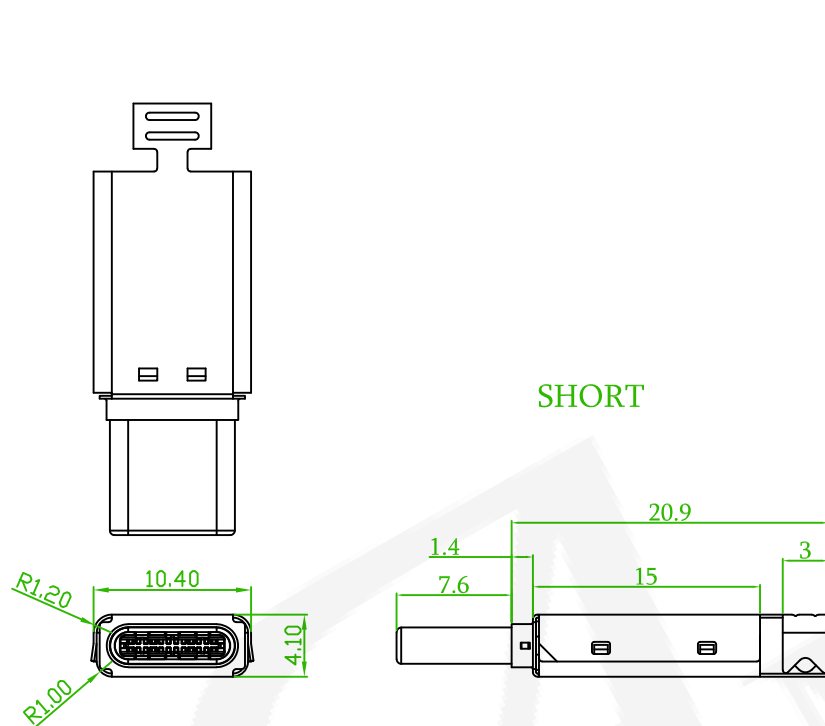


SHORT

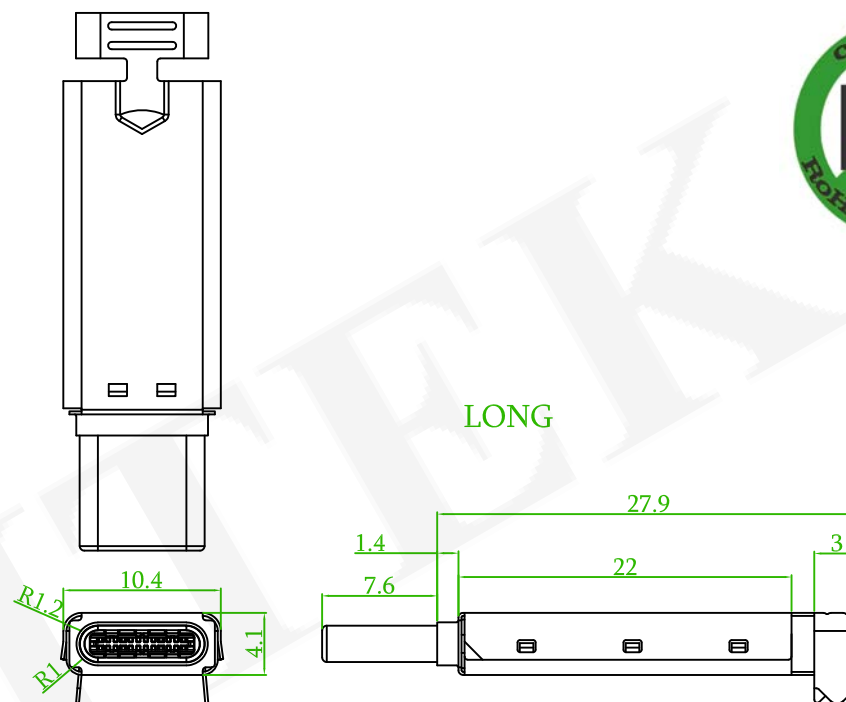


LONG

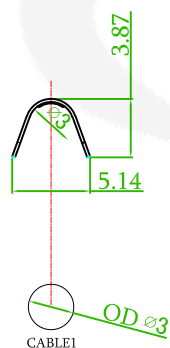


TYPE-1(ODØ3.0)

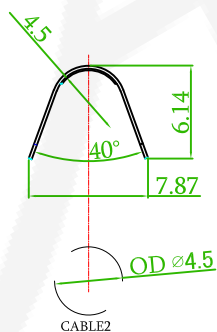

TYPE-2(ODØ4.5)

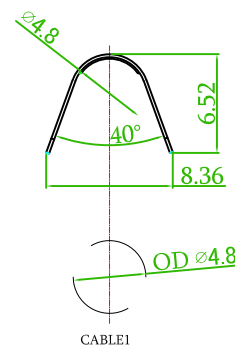

TYPE1(ODØ4.8)

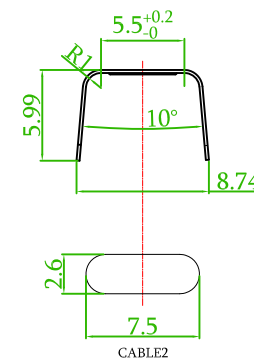

TYPE2(OD7.5*2.6)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x5	QEC190702:Revise the DIM,Revise the Drawing,Revise the Layout	Nick	2019/07/30

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	USB3.1-C TYPE MALE 180°				頁數 Page	2/2
	品號 PART NO.	5US4C01TM-124XXBUHCX				繪圖 DRAWN	Gary 2017/08/04
	圖號 DRAWING NO.	GW062-GA513		版本 REV.	B	核對 CHECKED	Carol 2017/08/04
	客戶品號 CUSTOMER P/N			比例 SCALE	1:1	承認 APPROVED	Jason 2017/08/04
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20		單位 UNIT	mm	THIRD ANGLE PROJECTION	