

SPECIFICATION




Current Rating: 3 A
Insulation Resistance: 100MΩ Min.
Contact Resistance: 40mΩ Max(Initial). 50mΩ Max (After)
Dielectric Withstanding Voltage: 100V AC RMS
Mating Force: 5N to 20N
Unmating Force: Initial: 8N to 20N(After Test: 6N to 20N)
Operating Temperature: -40°C to +70°C
Durability: 5000 Cycles

MATERIAL

Shell: SUS201
Housing: LCP ,UL94V-0 Black
Terminal: C2680
Mid Plate: SUS201

ORDER INFORMATION

5 U S 4 C 0 5 M F - 1 0 6 X X X U X 4 1

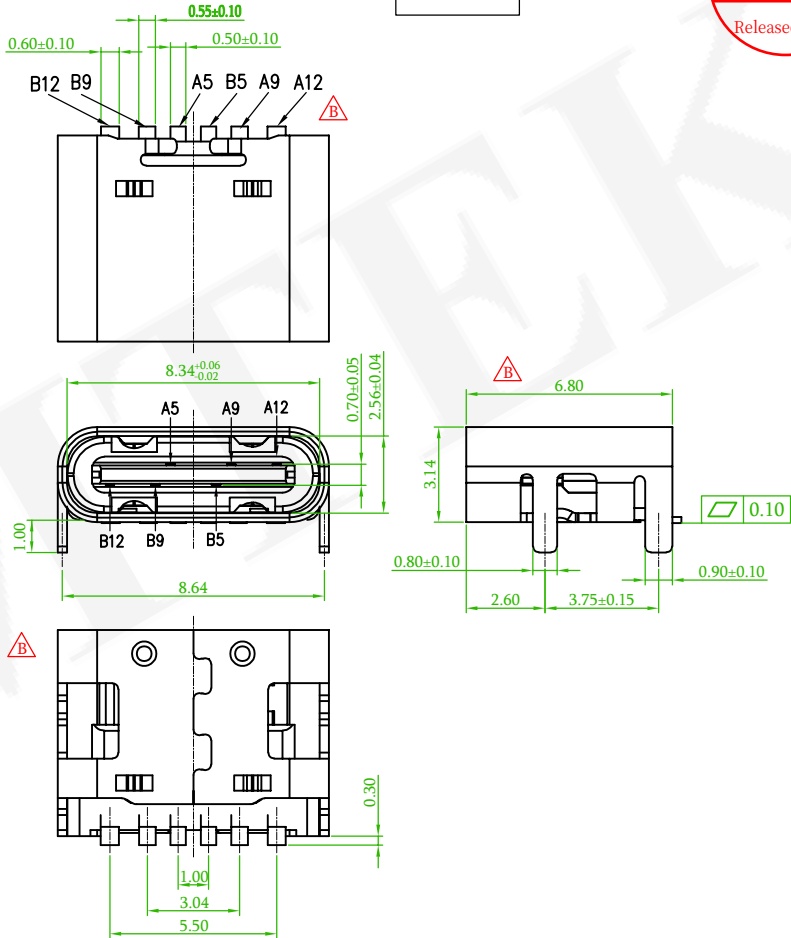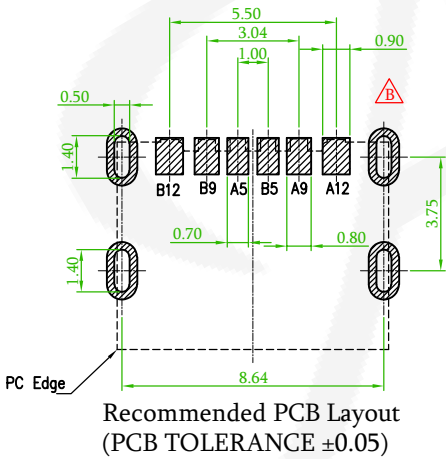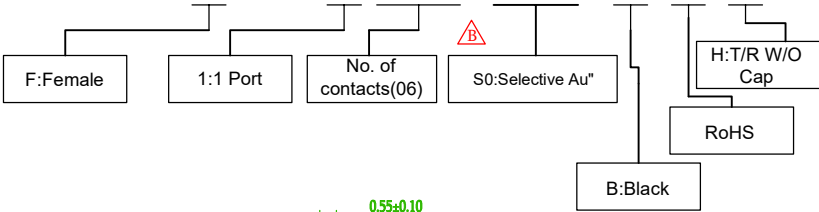

Amtek Technology Co., Ltd. logo and address information.

品名	USB3.1-C TYPE FEMALE SMT 90°				頁數	1/1
TITLE					Page	
品號	5US4C05MF-106XXXXX41				繪圖	Gaby
PART NO.					DRAWN	2023/12/08
圖號	GN195-GY421		版本	B	核對	Josh
DRAWING NO.			REV.		CHECKED	2023/12/08
客戶品號			比例	None	承認	Josh
CUSTOMER P/N			SCALE		APPROVED	2023/12/08
公差	.X ±0.30		單位	mm	THIRD ANGLE	
TOLERANCE	.XX ±0.20		UNIT		PROJECTION	

△	QEC No.:240116 Revise the drawing	Randy	2024/02/01
△	EasyFlow202312070003	Gaby	2023/12/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE