

SPECIFICATION



Current Rating: 3A
Voltage Rating: 20V AC
Contact Resistance: 40mΩ Max
Insulation Resistance: 100MΩ Min.
Dielectric Voltage: 100V AC for one minute
Operation Temperature: -40°C to +85°C
Durability: 10,000 cycles
Insertion Force : 5~20N (1~10,000)
Removal Force : 8~20N (1~1,000)
6~20N. (1,001~10,000)

MATERIAL



Insulator: LCP, UL94V-0 Black
Contact: Copper Alloy
Shell : Stainless Steel

ORDER INFORMATION

5 U S 4 C 2 1 M F - 1 1 6 G 0 B U H 4 1

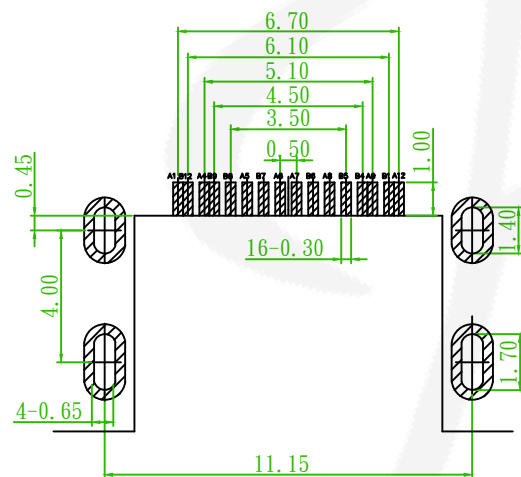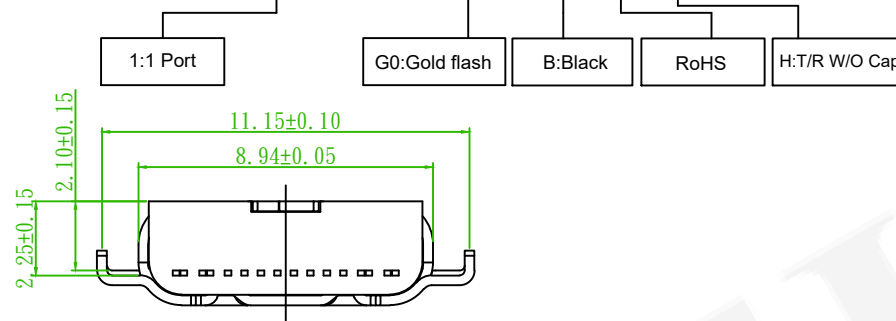

RECOMMENDED PCB LAYOUT(TOP VIEW)
(TOLERANCE: ±0.05mm)

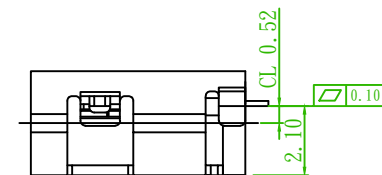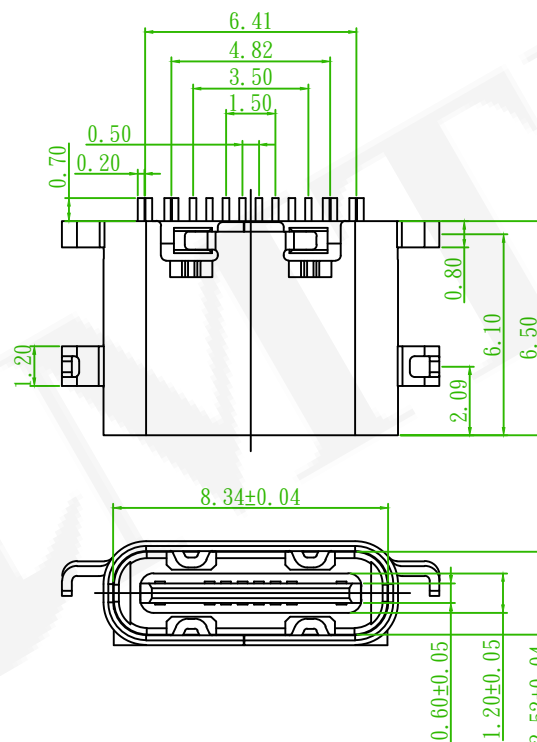

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	USB 3.1 C TYPE FEMALE SMT R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5US4C21MF-116G0BUH41				繪圖 DRAWN	Alice 2022/04/30
	圖號 DRAWING NO.	GN195-AB258	版本 REV.	A	核對 CHECKED	Josh 2022/04/30	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2022/04/30	
	公差 TOLERANCE	.X: ±0.38 .XX: ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE