

# ORDER INFORMATION

## SPECIFICATIONS

RATED CURRENT: 1 A AC,DC  
 RATED VOLTAGE: 50 V AC,DC  
 OPERATING TEMPERATURE: -25°C~+85°C  
 CONTACT RESISTANCE: ≤20 mΩ  
 INSULATION RESISTANCE: ≥100 MΩ  
 DIELECTRIC STRENGTH: 500 V AC, 1 MINUTE

## MATERIAL

INSULATOR: NYLON 6T, UL94V-0 △B  
 TERMINAL: PHOSPHOR BRONZE  
 SOLDER TAB: BRASS

5 W 1 0 0 1 H 0 - 2 X X X X X X U 4 0 1






TABLE △B△C


NO. OF CONTACTS PER ROW	Dimensions (mm)	
	A	B
04	3.0	7.10
05	4.0	8.10
06	5.0	9.10
08	7.0	11.10
10	9.0	13.10
15	14.0	18.10
20	19.0	23.10

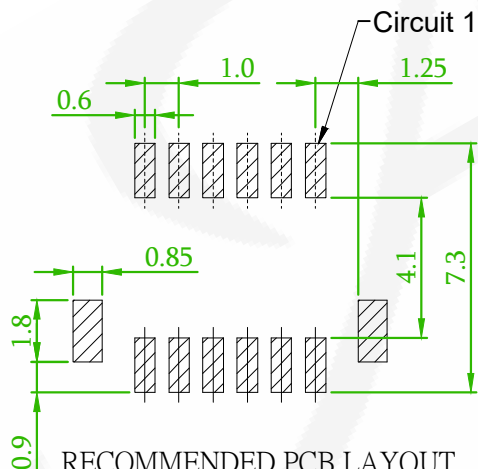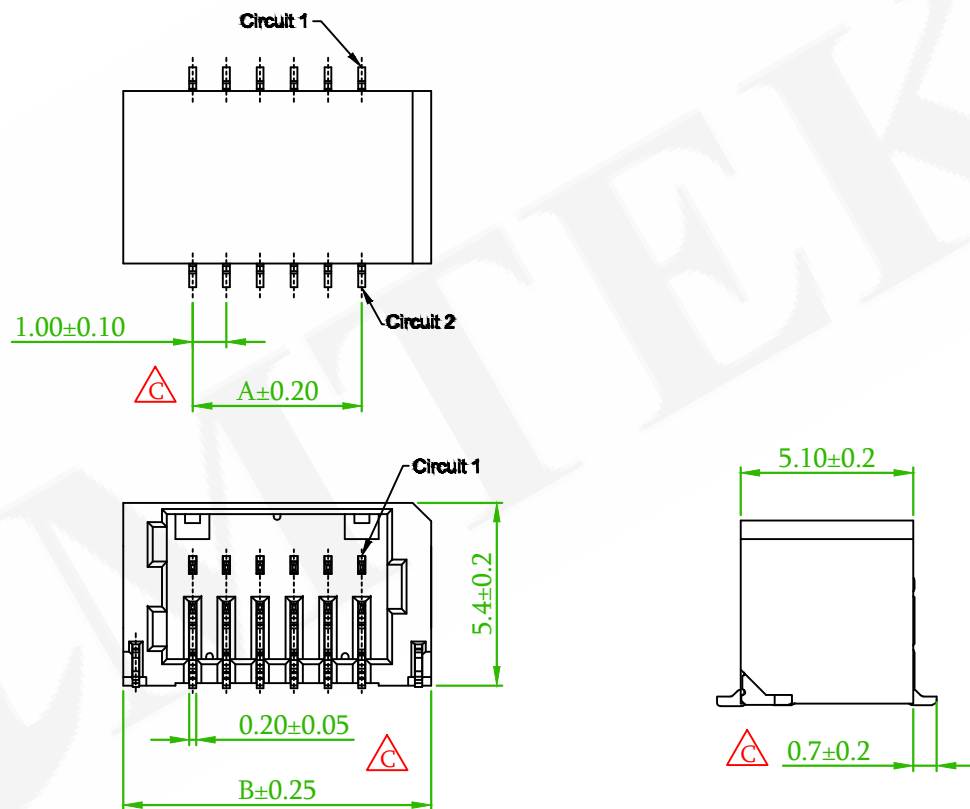


<span style="color:red">△</span> <span style="color:red">C</span>	ECN 202605026	Willy	2026/05/20
<span style="color:red">△</span> <span style="color:red">B</span>	ECN NO.:210923 Revise the drawing	Benson	2021/10/19
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

懋德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030


品名 TITLE	WAFER 1.0mm SMT R/A TYPE			頁數 Page	1/2
品號 PART NO.	5W1001H0-2XXXXXXU401			繪圖 DRAWN	Alice
圖號 DRAWING NO.	GN211-AZ399	版本 REV.	C	核對 CHECKED	Josh
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh
公差 TOLERANCE	.X±0.30 .XX±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	




2X4P




2X5P




2X6P

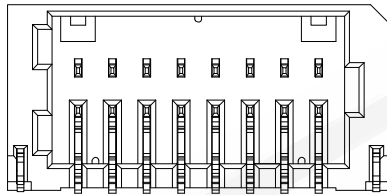


2X8P

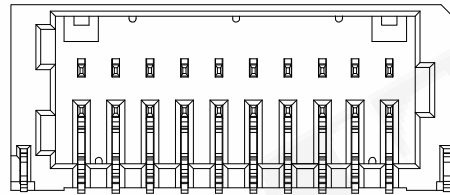

2X10P

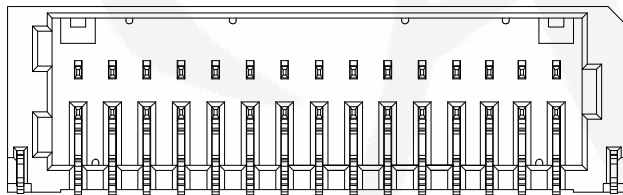

2X15P

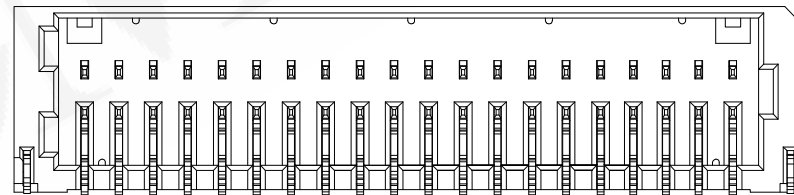

2X20P

△	ECN 202605026	Willy	2026/05/20
△	ECN NO.:210923 Revise the drawing	Benson	2021/10/19
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



**懌德精密有限公司**  
Amtek Technology Co., Ltd.  
TEL: 886-2-2260-6878  
FAX: 886-2-2260-8030

品名 TITLE	WAFER 1.0mm SMT R/A TYPE			頁數 Page	2/2
品號 PART NO.	5W1001H0-2XXXXXXU401		繪圖 DRAWN	Alice 2021/08/20	
圖號 DRAWING NO.	GN211-AZ399	版本 REV.	C	核對 CHECKED	Josh 2021/08/20
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2021/08/20
公差 TOLERANCE	. X±0.30 . XX±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	