

ORDER INFORMATION


SPECIFICATIONS

CURRENT RATING: 1A AC, DC
 VOLTAGE RATING: 150V AC, DC
 TEMPERATURE RANGE: -40°C TO +105°C
 CONTACT RESISTANCE: 30mΩ MAX.
 INSULATION RESISTANCE: 500MΩ MIN.
 DIELECTRIC VOLTAGE: 500V AC FOR ONE MINUTE




Material

SOLDER TABS: BRASS
 MATERIAL: NYLON 66, UL94V-0

5 W 1 2 5 2 S 0 - 1 X X X X X X L A 0 1

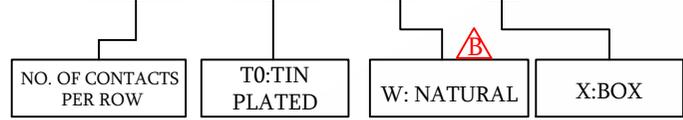

Circuit No.	Dimensions		
	A	B	C
02P	1.25	3.75	3.15
03P	2.50	5.00	4.40
04P	3.75	6.25	5.65
05P	5.00	7.50	6.90
06P	6.25	8.75	8.15
07P	7.50	10.00	9.40
08P	8.75	11.25	10.65
09P	10.00	12.50	11.90
10P	11.25	13.75	13.15
11P	12.50	15.50	14.40
12P	13.75	16.25	15.65
13P	15.00	17.50	16.90
14P	16.25	18.75	18.15
15P	17.50	20.00	19.40

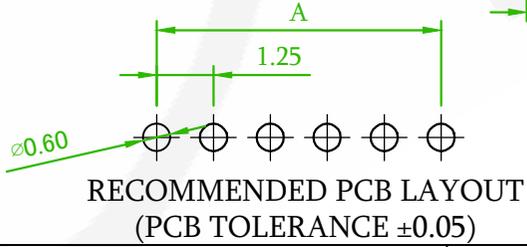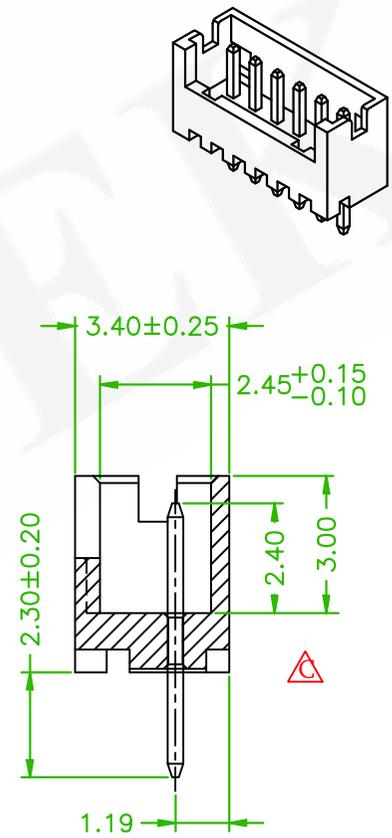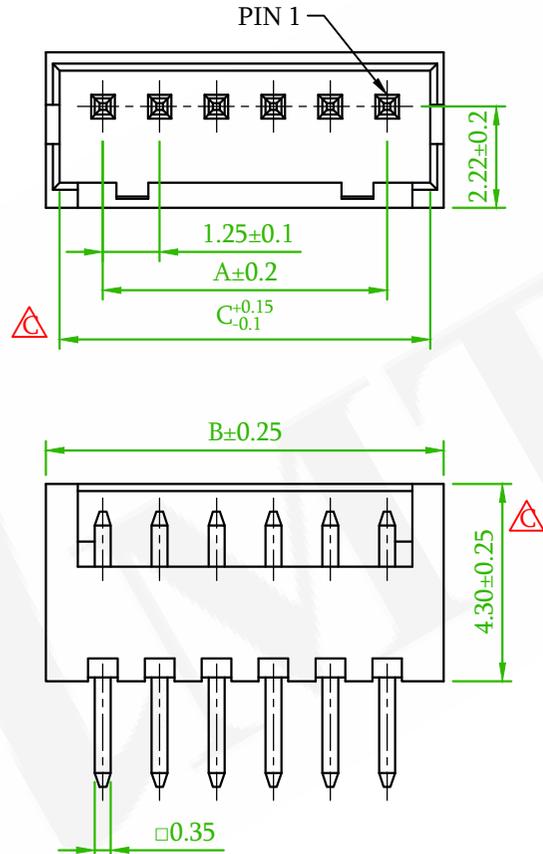

OLD PART NO.: 1252S-XXTW-L

Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	WAFER 1.25mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5W1252S0-1XXXXXXLA01			繪圖 DRAWN	Eloise 2016/11/30	
圖號 DRAWING NO.	GW090-EL009	版本 REV.	C	核對 CHECKED	Jonny 2016/11/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/30	
公差 TOLERANCE	.X ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

ECN-202602019	Oliver	2026/03/02
ECN NO.: 170908, REVISED THE COLOR.	Kilin	2017/09/07
REV. ECN NO. OR DESCRIPTION	REVISED	DATE