

ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 1A AC,DC

RATED VOLTAGE: 200V AC,DC $\triangle C$ INSULATION RESISTANCE: 100M Ω MIN.CONTACT RESISTANCE: 40m Ω MAX.

DIELECTRIC VOLTAGE: 500V AC/MINUTE

OPERATION TEMPERATURE: -40°C TO +105°C $\triangle C$ MATERIAL $\triangle C$

INSULATOR: NYLON 6T,UL94V-0

TERMINAL: BRASS

SHELL: PHOSPHOR BRONZE

5 W 1 2 5 6 H 0 - 1 X X X X X U A 0 1

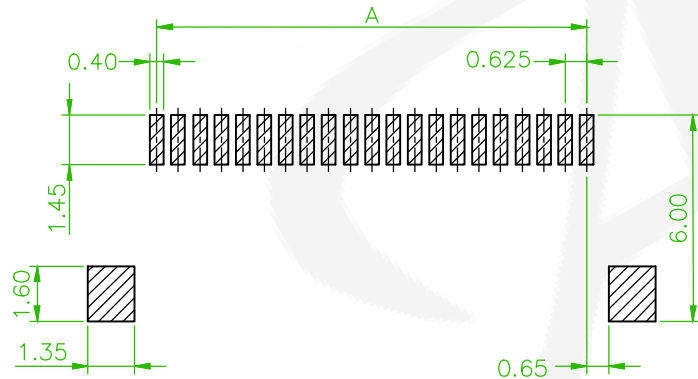

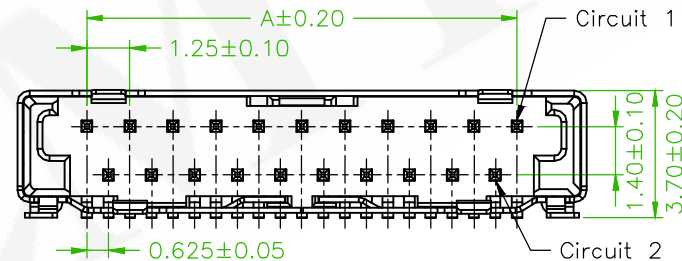
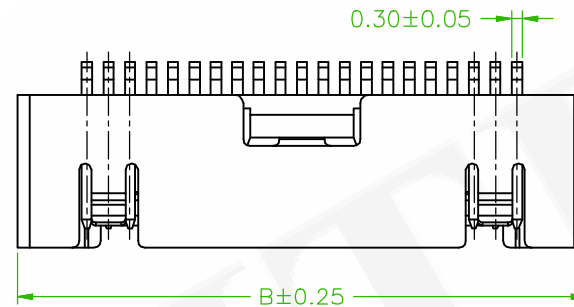
NO. OF CONTACTS
PER ROW

G3: Au 3u"

B: BLACK

H: T/R W/O CAP

PIN	Dimensions	
	A	B
21P	12.50	16.55
31P	18.75	22.80
41P	25.00	29.05

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

OLD PART NO.: 1256MR-XXGB-U

$\triangle C$	ECN-202607012 Revise the Drawing	Gaby	2026/07/21
$\triangle B$	ECN NO.230415:Revise the Drawing	Rex	2023/05/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		WAFER 1.25mm SMT R/A TYPE				頁數 Page	1/1
品號 PART NO.		5W1256H0-1XXXXXXUA01				繪圖 DRAWN	Roy 2016/09/08
圖號 DRAWING NO.		GW090-RE247	版本 REV.	C	核對 CHECKED	Jonny 2016/09/08	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/09/08	
公差 TOLERANCE		.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		