





SPECIFICATIONS
CURRENT RATING:3A AC,DC
VOLTAGE RATING: 350V AC,DC
TEMPERATURE RANGE: -25°C TO +85°C
CONTACT RESISTANCE: 20mΩ MAX
INSULATION RESISTANCE: 1000MΩ MIN
WITHSTANDING VOLTAGE: 500V AC/MINUTE

MATERIAL
PIN: BRASS
INSULATOR: NYLON 6T,UL94V-0

ORDER INFORMATION

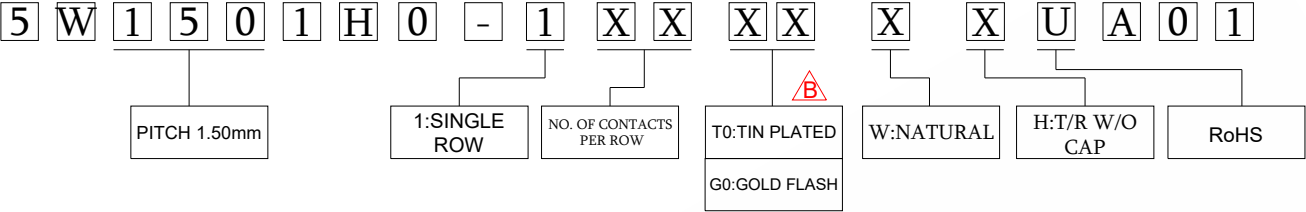

No. of contacts	Dimensions	
	A	B
02	1.50	4.30
03	3.00	5.80
04	4.50	7.30
05	6.00	8.80
06	7.50	10.30
07	9.00	11.80
08	10.50	13.30
09	12.00	14.80
10	13.50	16.30
11	15.00	17.80
12	16.50	19.30
13	18.00	20.80
14	19.50	22.30
15	21.00	23.80

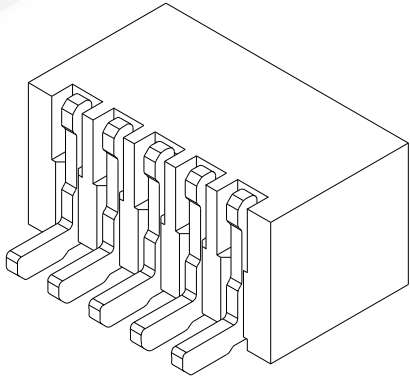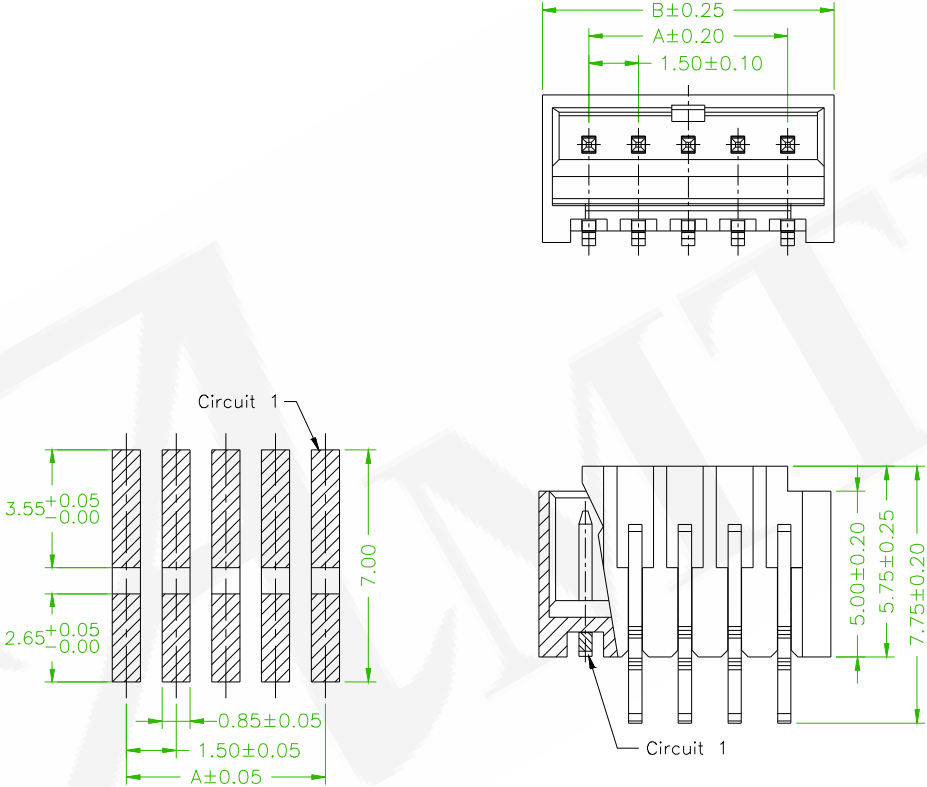

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

OLD PART NO.:1501MR-XXTWR-U

REV.	ECN-202506029	Alice	2025/06/30
	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	WAFER 1.50mm SMT R/A TYPE				頁數 Page	1/1
品號 PART NO.	5W1501H0-1XXXXXXUA01				繪圖 DRAWN	Jeff 2016/10/13
圖號 DRAWING NO.	GW090-WW319	版本 REV.	B	核對 CHECKED	Johnny 2016/10/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/13	
公差 TOLERANCE	.X ± 0.25 B.XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		