

ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 3A AC,DC

VOLTAGE RATING: 250V AC,DC

TEMPERATURE RANGE: -40°C ~ +105°C △B

CONTACT RESISTANCE: 10mΩ MAX

INSULATION RESISTANCE: 1000MΩ MIN

WITHSTANDING VOLTAGE: 800V AC/MINUTE

MATERIAL

INSULATOR: NYLON 6T,UL94V-0

TERMINAL: BRASS

5 W 2 0 0 4 S 2 - 2 X X X X X U A 0 1





NO. OF CONTACTS
PER ROW

G0:GOLD FLASH

W:NATURAL

B:BAG

NO. OF CONTACTS	DIMENSIONS	
	A	B
2x02	2.00	8.00
2x03	4.00	10.00
2x04	6.00	12.00
2x05	8.00	14.00
2x06	10.00	16.00
2x07	12.00	18.00
2x08	14.00	20.00
2x09	16.00	22.00
2x10	18.00	24.00
2x11	20.00	26.00
2x12	22.00	28.00
2x13	24.00	30.00
2x14	26.00	32.00
2x15	28.00	34.00
2x16	30.00	36.00
2x17	32.00	38.00
2x18	34.00	40.00
2x19	36.00	42.00
2x20	38.00	44.00
2x22	42.00	48.00

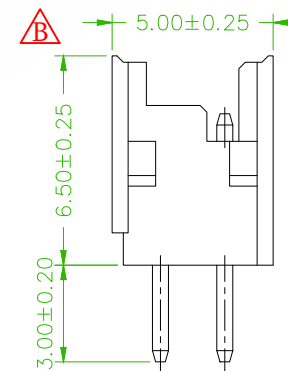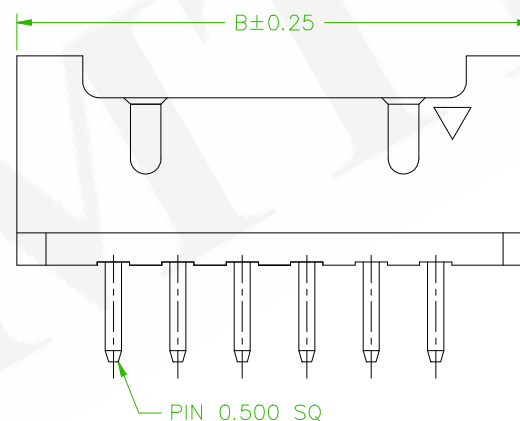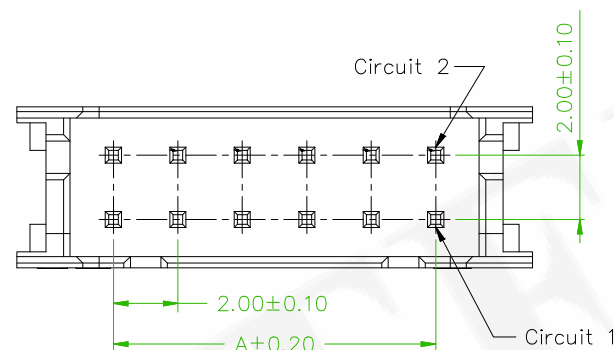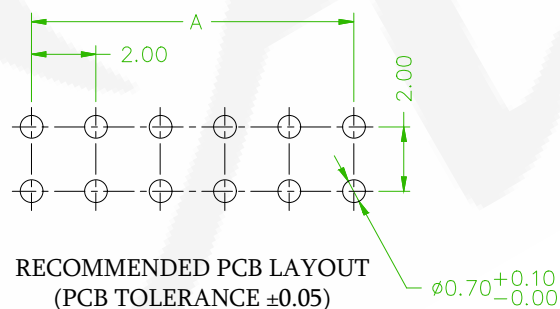

REV.	ECN-202606022 Revise the drawing	Gaby	2026/06/16
	ECN NO. OR DESCRIPTION	REVISED	DATE



懽德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	WAFER 2.00mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5W2004S2-2XXXXXXUA01				繪圖 DRAWN	Joe 2010/03/11
圖號 DRAWING NO.	GW090-EL024	版本 REV.	B	核對 CHECKED	Paul 2010/03/11	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/03/11	
公差 TOLERANCE	.X ±0.25 XX ±0.15	單位 UNIT	mm	第三 ANGLE PROJECTION		