

ORDER INFORMATION

VOLTAGE RATING: 125V AC,DC

TEMPERATURE RANGE: -40°C ~ +105°C

CONTACT RESISTANCE: 10mΩ MAX

INSULATION RESISTANCE: 1000MΩ MIN


WITHSTANDING VOLTAGE: 1000V AC/MINUTE

MATERIAL


PIN: BRASS

HOUSING: NYLON 66,UL94V-0

No. of contacts	Dimensions	
	A	B
02	2.00	5.96
03	4.00	7.96
04	6.00	9.96
05	8.00	11.96
06	10.00	13.96
07	12.00	15.96
08	14.00	17.96
09	16.00	19.96
10	18.00	21.96
11	20.00	23.96
12	22.00	25.96
13	24.00	27.96
14	26.00	29.96
15	28.00	31.96



RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

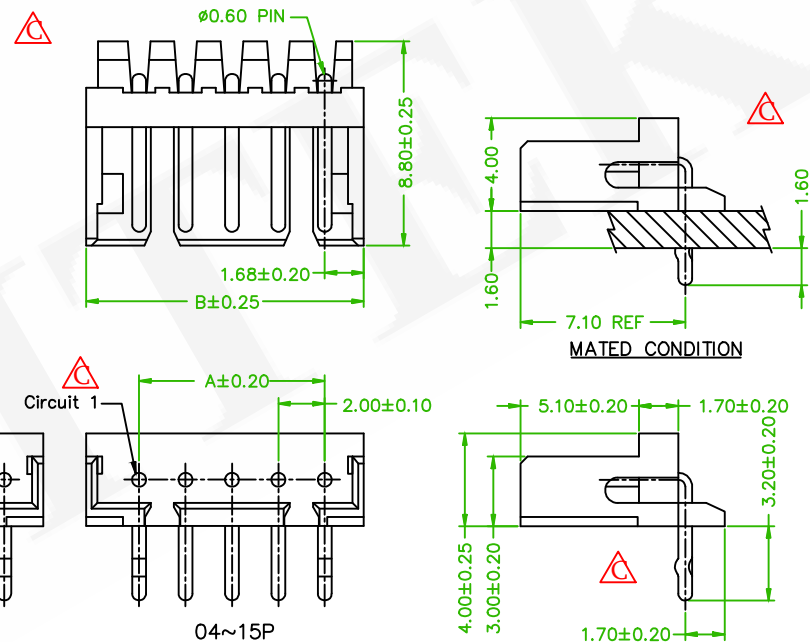

OLD PART NO.:2006R-XXTW-L

	ECN-202508023 Revise the drawing	Gaby	2025/09/09
	ECN No.:170908, Revised the Color	Kilin	2017/09/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.0mm WAFER DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5W2006R0-1XXXXXXLA01			繪圖 DRAWN	KENT 2007/09/13	
圖號 DRAWING NO.	GW090-EL031	版本 REV.	C	核對 CHECKED	JOSH 2007/09/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2007/09/13	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		