

ORDER INFORMATION








SPECIFICATIONS

CURRENT RATING: 2A AC,DC
 VOLTAGE RATING: 250V AC,DC
 TEMPERATURE RANGE: -25°C ~ +85°C
 CONTACT RESISTANCE: 30mΩ MAX
 INSULATION RESISTANCE: 1000MΩ MIN
 WITHSTANDING VOLTAGE: 800V AC/MINUTE

MATERIAL

PIN MATERIAL: BRASS
 MATERIAL: NYLON 6T, UL94V-0

5 W 2 0 1 1 G X - 2 X X X X X X U A 0 1

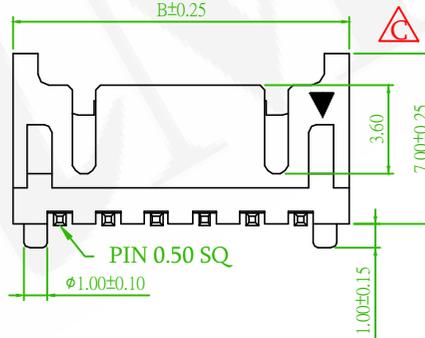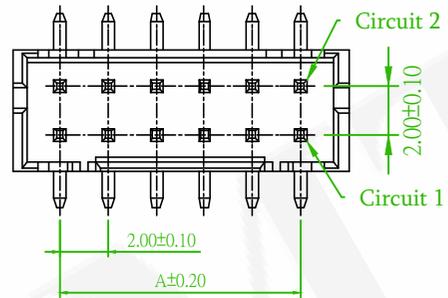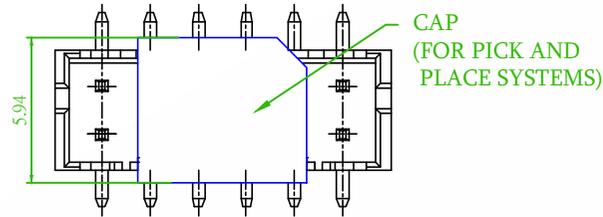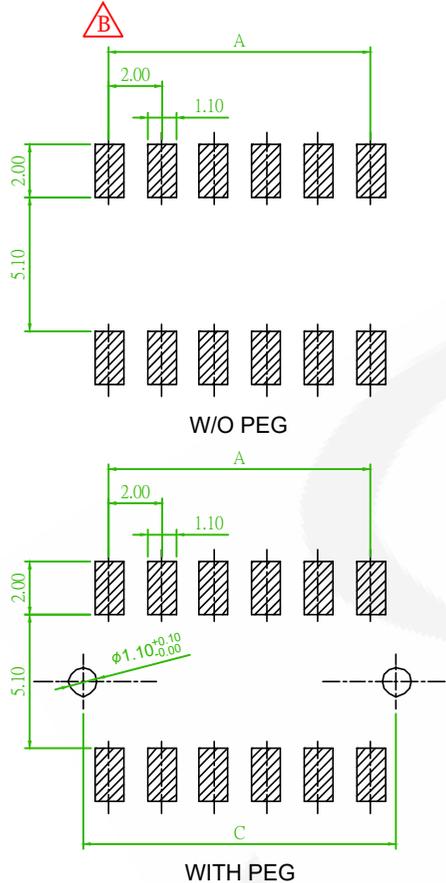

No. of contacts	Dimensions		
	A	B	C
2x02	2.00	6.00	4.00
2x03	4.00	8.00	6.00
2x04	6.00	10.00	8.00
2x05	8.00	12.00	10.00
2x06	10.00	14.00	12.00
2x07	12.00	16.00	14.00
2x08	14.00	18.00	16.00
2x09	16.00	20.00	18.00
2x10	18.00	22.00	20.00
2x11	20.00	24.00	22.00
2x12	22.00	26.00	24.00
2x13	24.00	28.00	26.00
2x14	26.00	30.00	28.00
2x15	28.00	32.00	30.00
2x16	30.00	34.00	32.00
2x17	32.00	36.00	34.00
2x18	34.00	38.00	36.00
2x19	36.00	40.00	38.00
2x20	38.00	42.00	40.00

RECOMMENDED PCB LAYOUT
 (PCB TOLERANCE ± 0.05)

OLD PART NO.: 2211MS-2XXGW-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
C	ECN-202602038 Revise the drawing	Gaby	2026/01/26
Bx3	Add: W/O Peg	David	2019/06/06

懃德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	WAFER 2.0mm SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	5W2011GX-2XXXXXXUA01				繪圖 DRAWN	Kent
圖號 DRAWING NO.	GW090-EL041	版本 REV.	C	核對 CHECKED	Paul	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James	
公差 TOLERANCE	.X ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	2006/11/15	
	XX ± 0.15				2006/11/15	