


ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 7A AC,DC
 VOLTAGE RATING: 600V AC,DC
 TEMPERATURE RANGE: -40°C ~ +105°C 
 CONTACT RESISTANCE: 3mΩ MAX
 INSULATION RESISTANCE: 5000MΩ MIN
 WITHSTANDING VOLTAGE: 2200V AC FOR ONE MINUTE


MATERIAL

PIN: BRASS, TIN PLATED
 HOUSING: NYLON 66, UL94V-0

5 W 3 9 6 5 R 0 - 1 X X X X X X L A 0 1

NO. OF CONTACTS PER ROW: X
 T0: TIN PLATED: X
 W: NATURAL: X
 B: BAG: X

No. of contacts	Dimensions	
	Dim.A	Dim.B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20

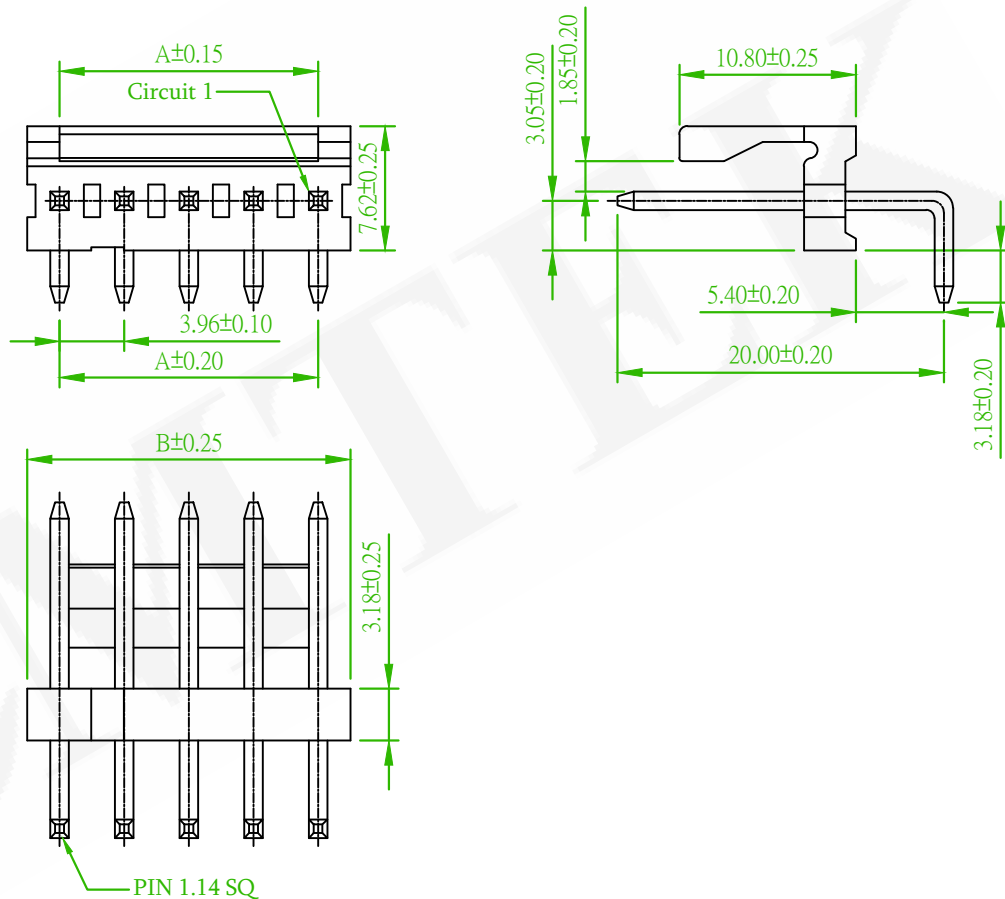

RECOMMENDED PCB LAYOUT
 (PCB TOLERANCE ± 0.05)

Old Part No.: 3965R-XXTW-L

REV.	ECN 202603019	Willy	2026/03/17
	ECN NO. OR DESCRIPTION	REVISED	DATE



懋德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	WAFER 3.96mm DIP R/A TYPE			頁數 Page	1/1
品號 PART NO.	5W3965R0-1XXXXXXLA01			繪圖 DRAWN	Jeff
圖號 DRAWING NO.	GW090-WW594	版本 REV.	B	核對 CHECKED	Jenny
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron
公差 TOLERANCE	.X ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	