


SPECIFICATIONS

CURRENT RATING: 7A AC,DC
VOLTAGE RATING: 250V AC. MAX
INSULATION RESISTANCE: 5000MΩ MIN.
CONTACT RESISTANCE: 10mΩ MAX.
DIELECTRIC VOLTAGE: 1500V AC FOR ONE MINUTE
OPERATION TEMPERATURE:-40°C TO +105°C

ORDER INFORMATION




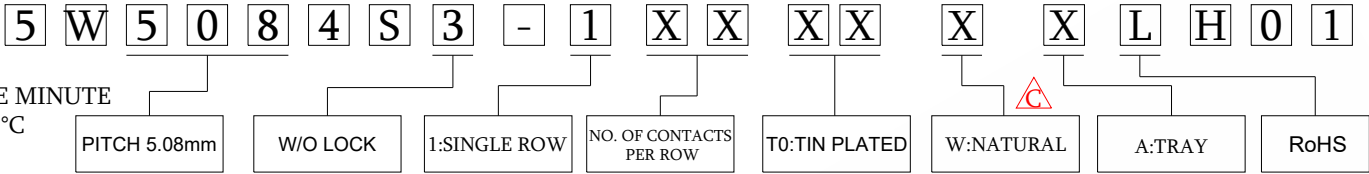


MATERIAL

INSULATOR:NYLON 66,UL94V-2
CONTACT:BRASS
MATES WITH .045"[1.14mm] SQUARE PINS
APPLICABLE PC BOARD THICKNESS: .063"[1.6mm]



PIN	DIM.A	DIM.B	Tolerances
02	5.08	10.16	±0.25
03	10.16	15.24	
04	15.24	20.32	
05	20.32	25.40	
06	25.40	30.48	
07	30.48	35.56	
08	35.56	40.64	±0.30
09	40.64	45.72	
10	45.72	50.80	
11	50.80	55.88	
12	55.88	60.96	

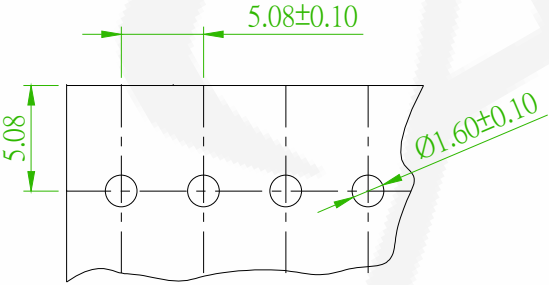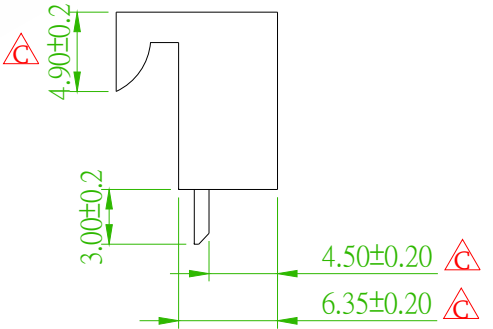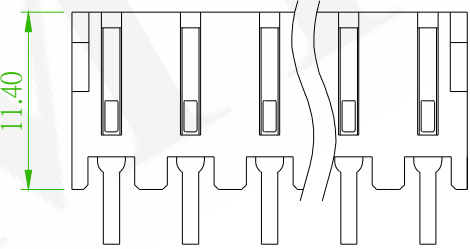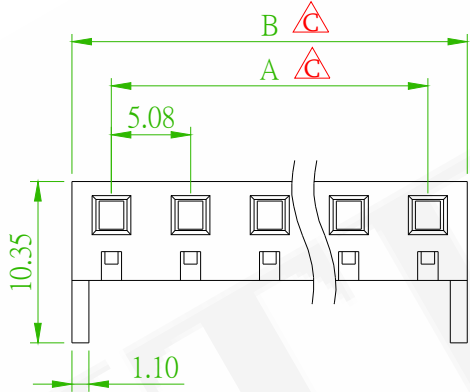

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

Old Part NO.:5084C-XX-2-L

	ECN-202509047	Alice	2025/10/01
	ECN NO.:230830 Revise the drawing	Randy	2023/09/14
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	WAFER 5.08mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5W5084S3-1XXXXXXLH01				繪圖 DRAWN	Kent 2007/01/16
圖號 DRAWING NO.	GW090-EL326	版本 REV.	C	核對 CHECKED	Paul 2007/01/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/01/16	
公差 TOLERANCE	.X ±0.20 .XX ±0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		