

ORDER INFORMATION

SPECIFICATIONS

VOLTAGE RATING: 600V AC / DC

CURRENT RATING: 21A AC/DC BINSULATION RESISTANCE: 1000M Ω MIN.CONTACT RESISTANCE: 5m Ω MAXAFTER ENVIRONMENTAL TESTING: 10m Ω MAX

DIELECTRIC VOLTAGE: 2200V AC FOR ONE MINUTE

OPERATION TEMPERATURE: -40°C TO +105°C

MATERIAL

INSULTOR: LCP, UL94V-0

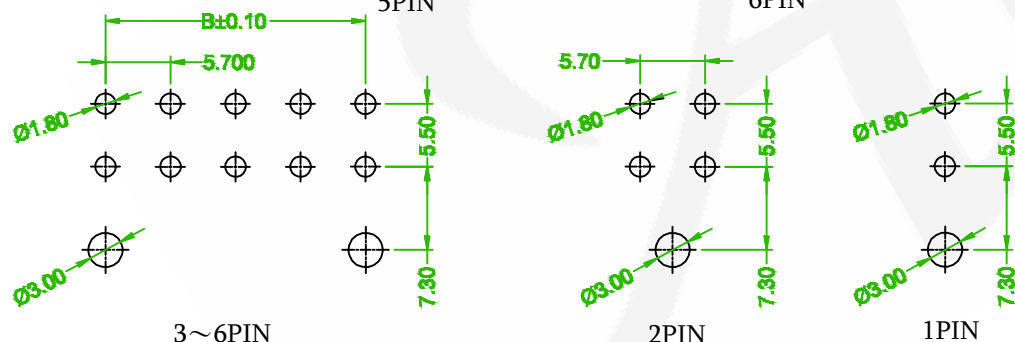
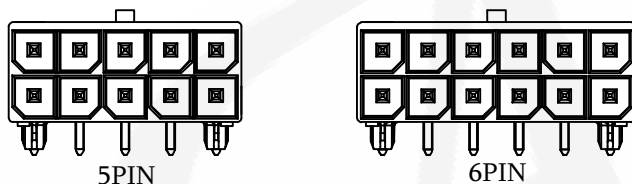
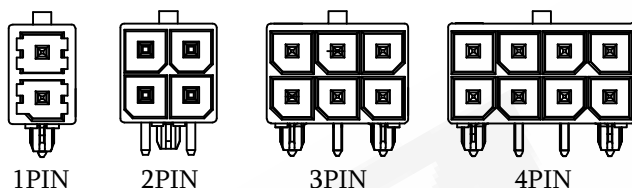
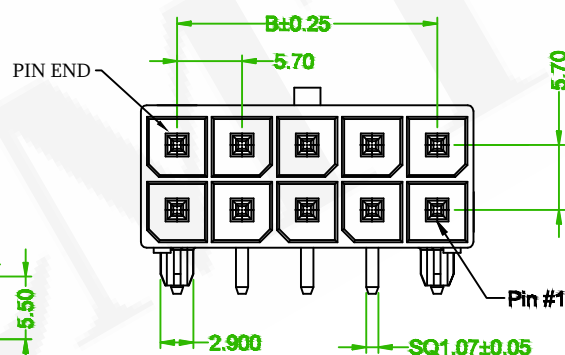
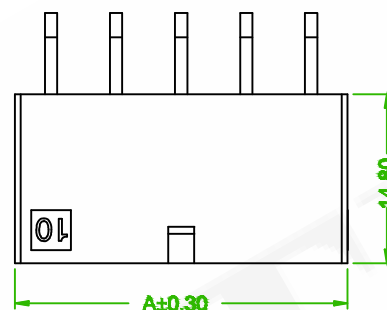
CONTACT PIN: HIGH CONDUCTIVE BRASS

5 W 5 7 0 0 R 1 - 2 X X X X X X U K 0 1

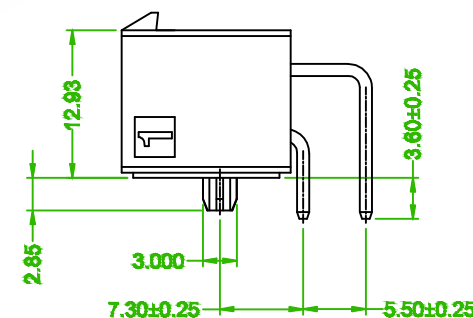
NO. OF CONTACTS
PER ROWTM:MATTE
TIN

B:BLACK

A:TRAY

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

NO. OF CONTACTS	DIMENSIONS(mm)	
	A	B
2x01	8.35	-
2x02	12.05	5.70
2x03	17.75	11.40
2x04	23.45	17.10
2x05	29.15	22.80
2x06	34.85	28.50



B	ECN-202607038	Gaby	2026/08/04
A	Easy Flow 202403210004	Gaby	2024/03/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



懰德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		WAFER 5.7mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.		5W5700R1-2XXXXXXUK01				繪圖 DRAWN	Gaby 2024/03/25
圖號 DRAWING NO.		GN137-GY578	版本 REV.	B	核對 CHECKED	Josh 2024/03/25	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2024/03/25	
公差 TOLERANCE		.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		