

SPECIFICATIONS


CURRENT RATING: 13A(2~4P),11A(6~10P)
VOLTAGE RATING: 600V AC, DC
OPERATION TEMPERATURE: -55°C TO 105°C
DIELECTRIC VOLTAGE: 5000V AC FOR ONE MINUTE

MATERIAL






CONTACT PIN: PHOSPHOR BRONZE
INSULATOR: NYLON 66, UL 94V-2/UL 94V-0

ORDER INFORMATION

5 W 6 3 5 0 S F - 1 X X X X L C 0 X

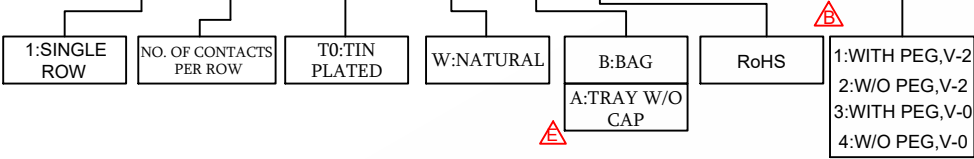

NO. OF CONTACTS	DIMENSIONS(mm)	
	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
07	38.10	45.72
08	44.45	52.07
09	50.80	58.42
10	57.15	64.77

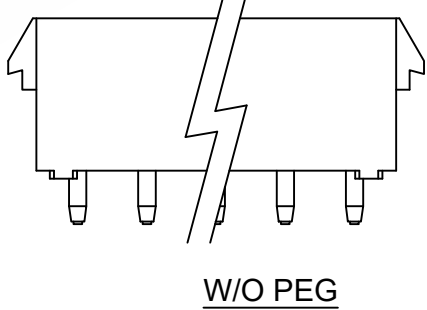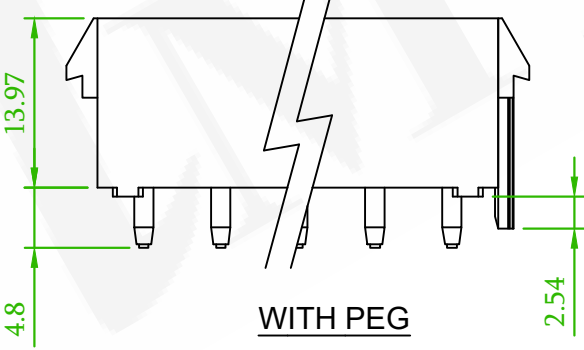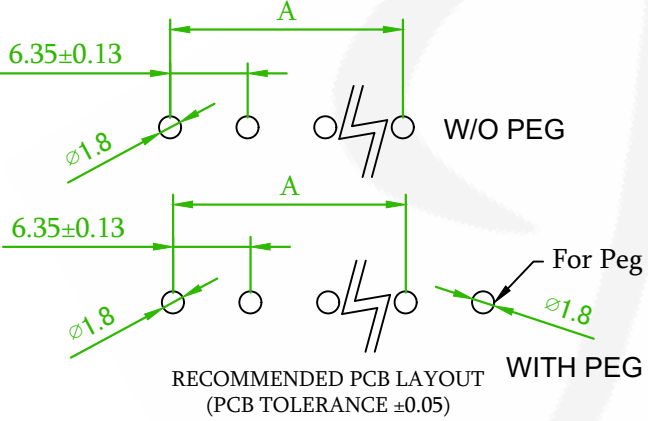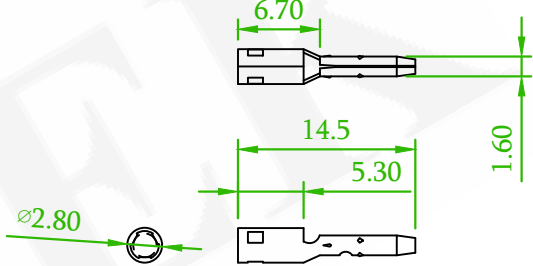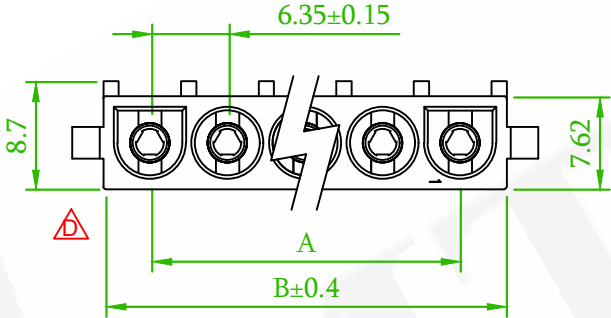

OLD PART NO.:6350S-F1XXTWX-L

△	ECN-202411021 Revise the drawing	Gaby	2025/01/24
△	ECN-202412014 Revise the drawing	Gaby	2024/12/30
△x2	Add the options	Nick	2019/04/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 懽德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Wafer 6.35mm DIP V/T TYPE				頁數 Page	1/1
	品號 PART NO.	5W6350SF-1XXXXXXLC0X(V2,V0)				繪圖 DRAWN	JEFF 2018/09/17
	圖號 DRAWING NO.	GN110-DW933	版本 REV.	E	核對 CHECKED	JOSH 2018/09/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JASON 2024/05/27	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		