

MATERIAL & FINISH

- ① CENTER CONTACT : PHOSPHOR BRONZE, GOLD PLATING
② BODY : ZINC ALLOY, NICKEL PLATING
③ HOUSING : PBT (94 V-0)
④ INSULATOR : PE-606
⑤ MOUNTING POST : IRON, TIN PLATING
⑥ SOLDER TAIL : COPPER WIRE, TIN PLATING
⑦ WASHER : STEEL, NICKEL PLATING
⑧ NUT : BRASS, NICKEL PLATING

ORDER INFORMATION

6 2 B N C S 0 1 - F X G 0 B A 0 1


S: PCB 180°

F: Female

5:50Ω
7:75Ω


G0: Gold Flash

B: Black

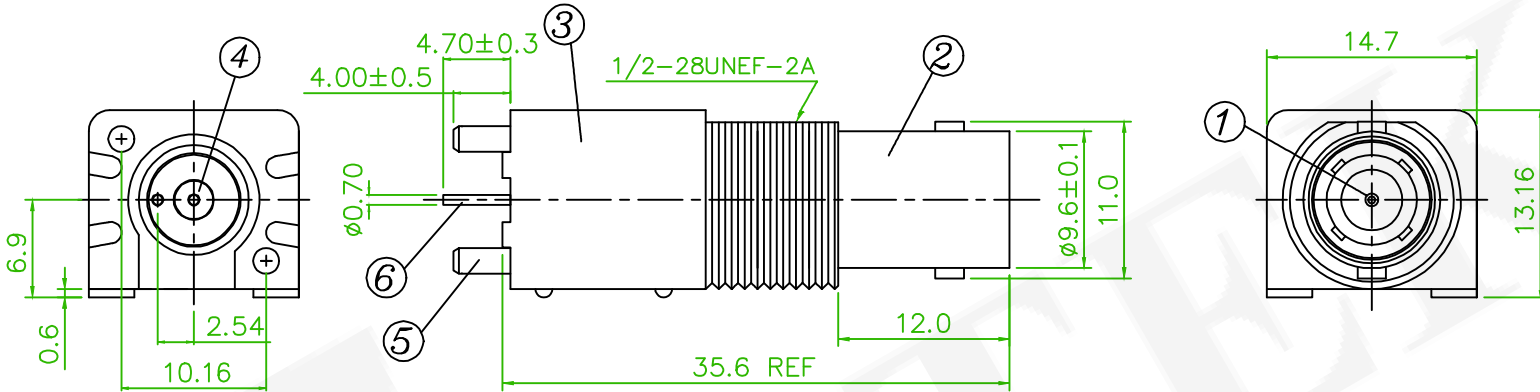


AMTEK 糧德
2022.04.29
Released DCC

RECOMMENDED PC BOARD LAYOUT
WITH HIGH MOUNTING POSTS

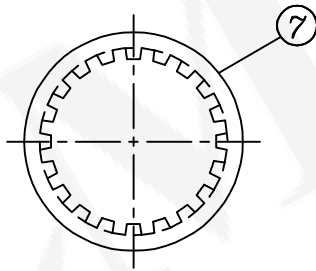


LOCK WASHER

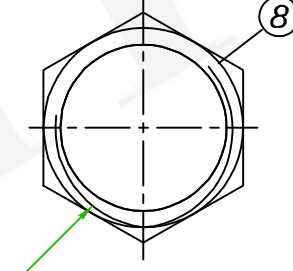

CLAMP NUT

Accessories



RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS: 5.5MM

Old P/N: BNCS005-F5GW2X-L

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	50Ω BNC VERTICAL PCB/PANEL MOUNT JACK				頁數 Page	1/1
品號 PART NO.	62BNCS01-FXG0BA01				繪圖 DRAWN	Sinnys 2010/06/01
圖號 DRAWING NO.	GW017-MC496	版本 REV.	B	核對 CHECKED	Yvonne 2010/06/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/06/01	
公差 TOLERANCE	.X±0.30 .XX±0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO.: 220406 Revise the drawing	Alice	2022/04/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE