

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- 1. BRASS
 - 2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
 - 3. BERYLLIUM COPPER
 - 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
 - 5. TEFLON

ORDER INFORMATION

62DMCC06

-

M5

G3

WC

01

M:Male

5:50Ω



G3:Gold 3u"

W:Natural



AMTEK 糧德
2018.11.22
Released DCC

6	FERRULE	COPPER	NOTE 2	1
5	RETAINER RING	NOTE 3	NOTE 2	1
4	CONTACT PIN	NOTE 1	NOTE 4	1
3	BARREL	NOTE 1	NOTE 2	1
2	INSULATOR	NOTE 5	NATURAL	1
1	BODY	NOTE 1	NOTE 2	1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY

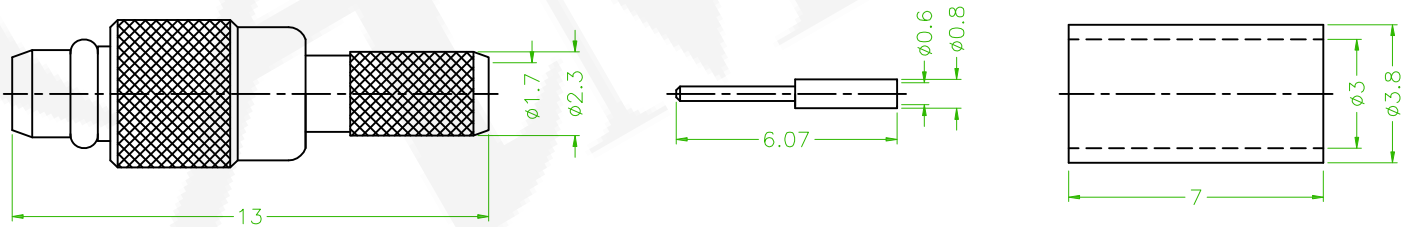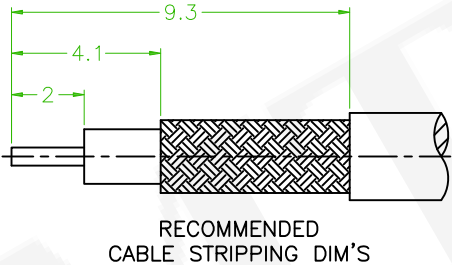

- 1. CRIMPED FERRULE
HEX. CRIMP SIZE .128"
- 2. CONTACT PIN TO SOLDER

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MMCX CONN. SERIES				頁數 Page	1/1
	品號 PART NO.	62DMCC06-M5G3WC01				繪圖 DRAWN	Roy 2018/11/22
	圖號 DRAWING NO.	GW141-RR978		版本 REV.	A	核對 CHECKED	Josh 2018/11/22
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/11/22
	公差 TOLERANCE	0.5 - 5 ± 0.2 6 - 30 ± 0.4		單位 UNIT	mm	THIRD ANGLE PROJECTION	