

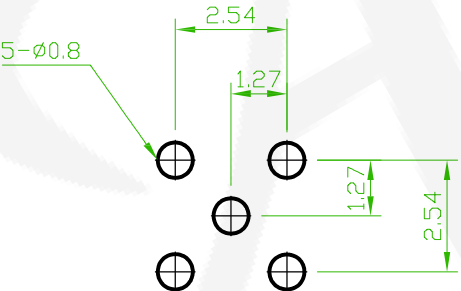


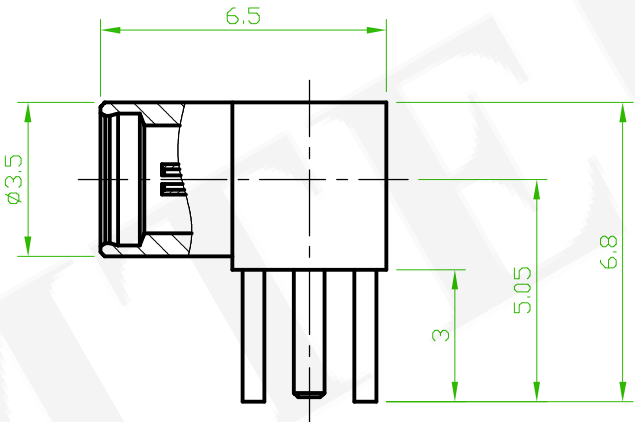


SPECIFICATIONS

Working Voltage: 170V AC
Withstanf Voltage: 500V AC for one minute
Frequency Range: DC ~ 6GHz
Impedance: 50Ω
Operation Temperature: -40°C to +85°C
VSWA: ≤1.5
Durability: 500 cycles

ORDER INFORMATION

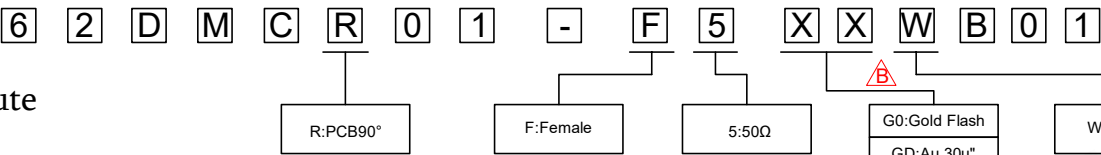

P.C.B LAYOUT

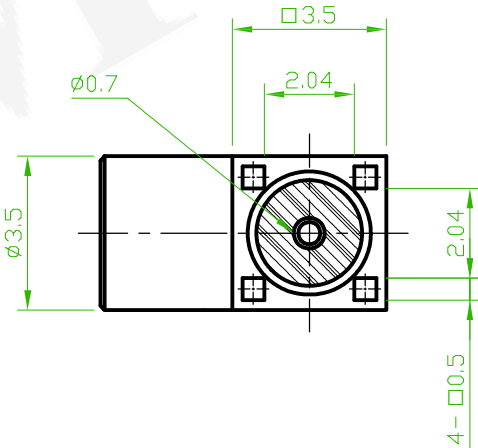

Old Part No.:MMCX010-F5GWW-L

04	CENTER PIN	BERYLLIUM COPPER	1	GOLD
03	INSULATOR	TEFLON	1	
02	INSULATOR	TEFLON	1	
01	BODY	BRASS	1	GOLD
NO DESCRIPTION MATERIAL			Q'TY	FINISH

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x3	Add :Plated: GD:Au 30u", Add: Specification	David	2020/10/06

AMTEK 糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MMCX ,Jack For P.B.C Mount Right Angle				頁數 Page	1/1
品號 PART NO.	△ 62DMCR01-F5XXWB01			繪圖 DRAWN	Sinnys 2010/05/24	
圖號 DRAWING NO.	GW141-MC667	版本 REV.	B	核對 CHECKED	Joel 2010/05/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/05/24	
公差 TOLERANCE	.X ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		