
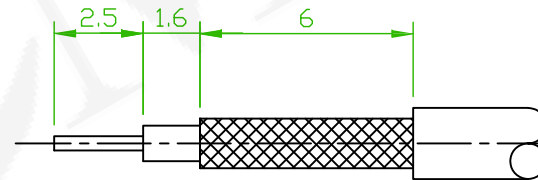
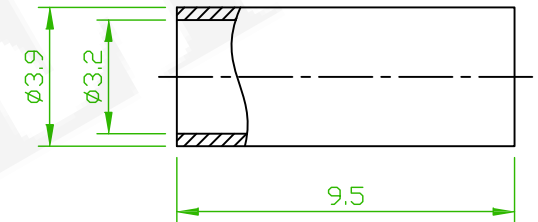
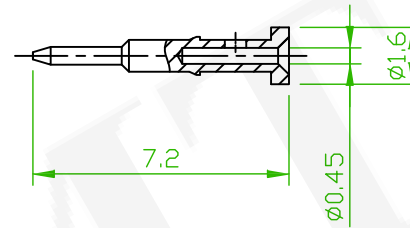


ORDER INFORMATION

6 2 M C X C 0 1 - M 7 G 0 W B 0 2

M:Male	7: 75Ω	G0:Gold Flash	W:Natural
--------	--------	---------------	-----------

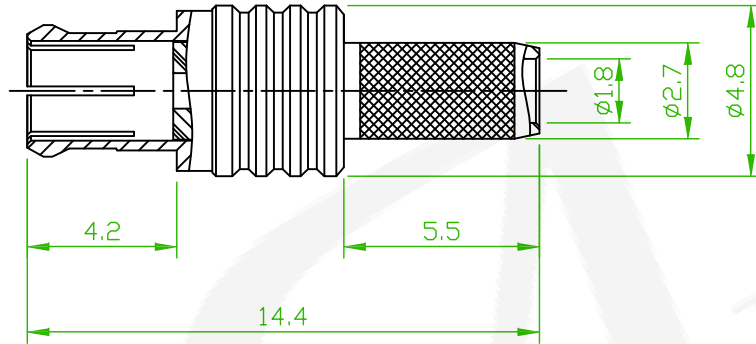

Recommended Strip Lengths

05	FERRULE	BRASS	1	GOLD
04	CENTER PIN	BRASS	1	GOLD
03	BODY	BRASS	1	GOLD
02	INSULATOR	TEFLON	1	
01	BODY	PHOSPHOR BRONZE	1	GOLD
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

IMPEDANCE	75 Ω
FREQUENCY	0-6.0 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 VRMS MIN
WORKING VOLTAGE	335 VRMS MAX.
INSULATION RESISTANCE	1000 MEGOHMS MIN
CONTACT INNER CONDUCTOR	= 5.0 MILIONHMS
RESISTANCE OUTER CONDUCTOR	= 2.5 MILIONHMS

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MCX Plug 75Ω				頁數 Page	1/1
	品號 PART NO.	62MCXC01-M7G0WB02				繪圖 DRAWN	David 2019/06/20
	圖號 DRAWING NO.	GW141-DV134	版本 REV.	A	核對 CHECKED	Josh 2019/06/20	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/06/20	
	公差 TOLERANCE	±0.40	單位 UNIT	mm	THIRD ANGLE PROJECTION		