
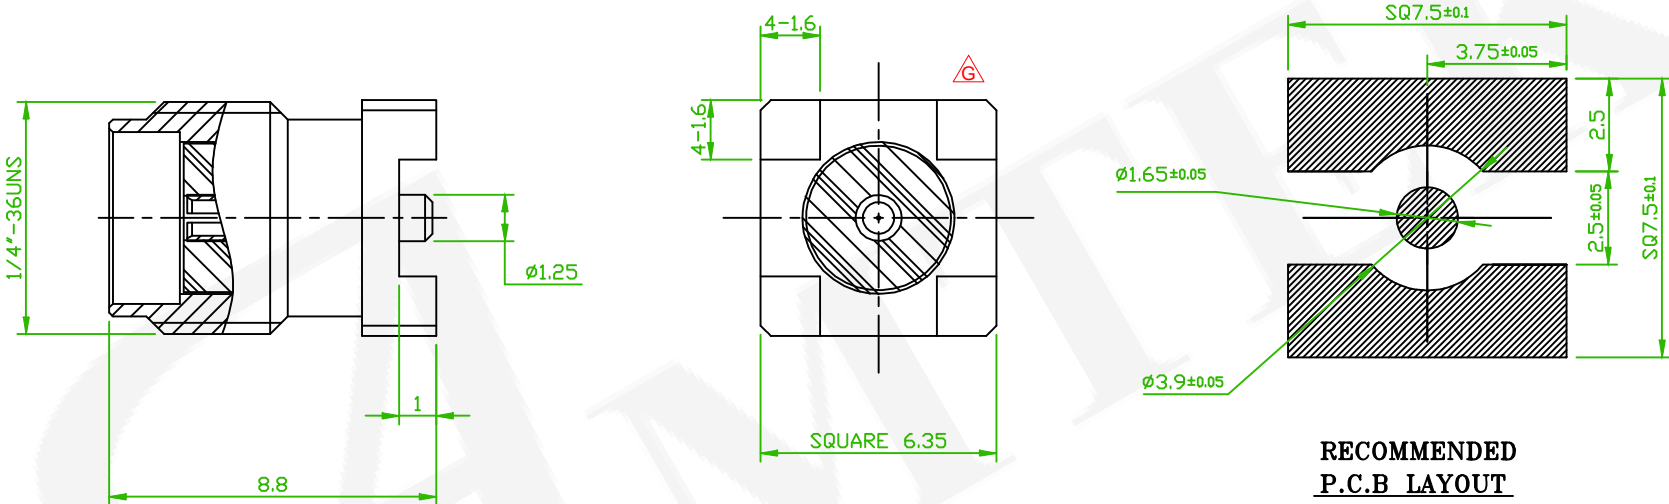


SPECIFICATIONS

WORKING VOLTAGE: 500V
INSULATION RESISTANCE:5000 MΩ
WITHSTAND VOLTAGE: 1000V AC FOR ONE MINUTE
IMPEDANCE: 50Ω
FREQUENCY RANGE: DC 0 ~ 18GHz
VSWR: 1.3 MAX
OPERATION TEMPERATURE: -40 °C to +85 °C
DURABILITY: 500 CYCLES
PACKING BAG: 400PCS/TRAY

ORDER INFORMATION

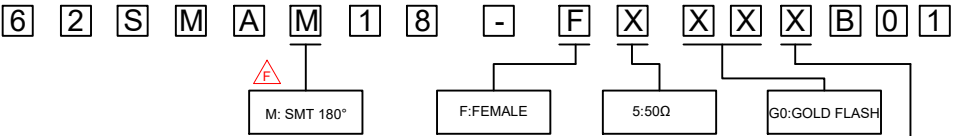

03	CENTER PIN	PHOSPHOR BRONZE	1	GOLD
02	INSULATOR	TEFLON	1	
01	BODY	BRASS	1	GOLD
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

AMTEK 糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SMA CONN. SERIES				頁數 Page	1/1
品號 PART NO.	62SMAM18-FXXXXB01				繪圖 DRAWN	Roy 2016/05/06
圖號 DRAWING NO.	GW141-MC630	版本 REV.	G	核對 CHECKED	Sabrina 2016/05/06	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/05/06	
公差 TOLERANCE	±0.4 .X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△	ECN NO.:240528 Revise the drawing	Alice	2024/06/12
△x2	ECN NO.:221120 Revise the Order information	David	2022/12/08
△x1	ECN NO.:220202 Revise the drawing	Alice	2022/02/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE