SPECIFICATION

OPERATION TEMPERATURE: -40°C to +85°C
FREQUENCY RANGE: DC to 6GHZ
WORKING VOLTAGE: 500 V
WITHSTAND VOLTAGE: 1000V
DURABILITY: 500 Matings

ORDER INFORMATION

6	2	S	M	A	R	0	1	-	F	5	G	X	W	B	0	1

- R: PCB 90°
- F:Female
- 5:50Ω
- G0:Gold Flash / GD:Au 30u"
- W:White

certified Pb RoHS Compliant

AMTEK糧德 2019.10.04 Released DCC



RECOMMENDED MOUNTING HOLES

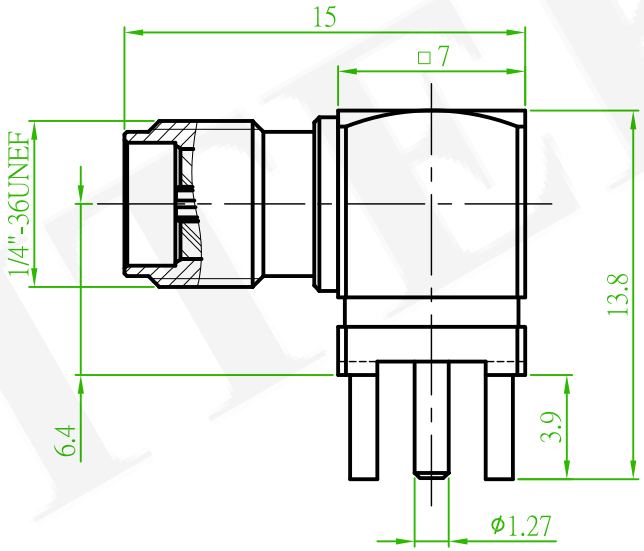

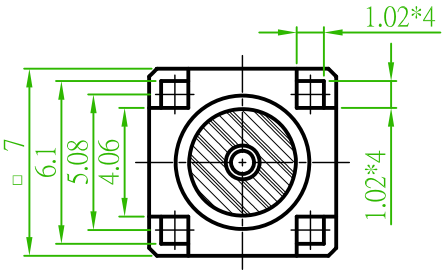

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
05	INSULATOR	TEFLON	1	
04	BODY	BRASS	1	GOLD/NICKEL
03	CENTER PIN	PHOSPHOR BRONZE	1	GOLD/GOLD Au 30u"
02	INSULATOR	TEFLON	1	
01	BODY	BRASS	1	GOLD/NICKEL

Old P/N: SMA009-F5GW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Dx1	ADD : SPECIFICATIONS	David	2019/10/04
Cx2	ADD The Plated:GD:Au 30u"	Kilin	2017/10/24

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SMA CONN. SERIES			頁數 Page	1/1
品號 PART NO.	B C 62SMAR01-F5GXWB01			繪圖 DRAWN	Gary 2017/04/12
圖號 DRAWING NO.	GW141-GA368	版本 REV.	D	核對 CHECKED	Jonny 2017/04/12
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/04/12
公差 TOLERANCE	±0.1 .X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	