

ELECTRICAL SPECIFICATIONS:

Voltage Rating:AC 500V

With Standing Voltage:AC 1,000V one minute

Contact Resistance:4mΩMax. at DC 0.1A

Frequency Range:0-12GHZ

Impedance:50Ω

ORDER INFORMATION

6 2 S M A S 0 1 - F 5 G 0 W B 0 1

S:PCB 180°

F:Female

5:50Ω

G0:Gold Flash


W:White





AMTEK 糧德

2021.03.24

Released DCC

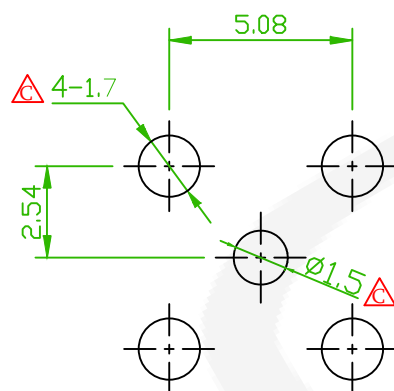

RECOMMENDED MOUNTING HOLES

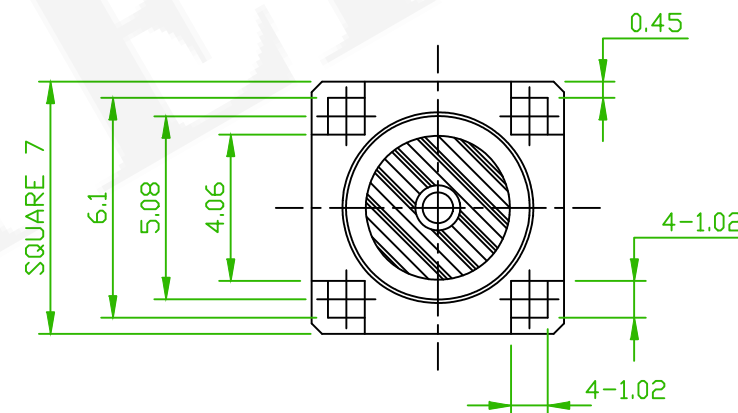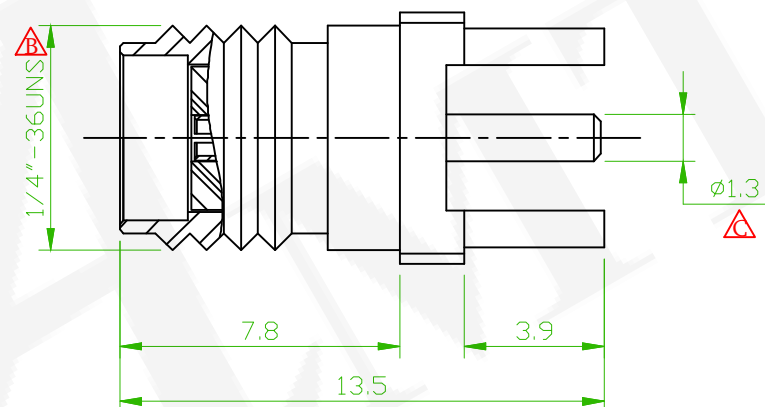

Old Part No. : SMA010-F5GWG-L

05	PRESS WASHER	BRASS	1	GOLD
04	INSULATOR	TEFLON	1	
03	CENTER PIN	PHOSPHOR BRONZE	1	GOLD
02	INSULATOR	TEFLON	1	
01	BODY	BRASS	1	GOLD
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

△x3	ECN NO.: 210307 Revise the drawing	Alice	2021/03/22
△x1	ECN NO.: 200505 Revise the drawing	Benson	2020/06/17
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SMA FOR P.C.B MOUNT				頁數 Page	1/1
品號 PART NO.	62SMAS01-F5G0WB01				繪圖 DRAWN	Sam 2009/06/08
圖號 DRAWING NO.	GW141-MC492	版本 REV.	C	核對 CHECKED	Paul 2009/06/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/06/08	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		