







NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS
 2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER
 PL. 50 MIN. THICK
 3. BERYLLIUM COPPER
 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
 OVER COPPER PL. 50 MIN. THICK
 5. TEFLON

NOTES : 1. BOARD THICKNESS=1.57mm
 2. MAX. PANEL THICKNESS 4.8mm

RoHS COMPLIANT



ORDER INFORMATION

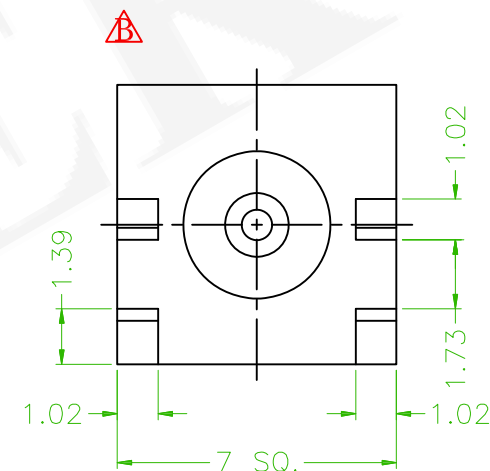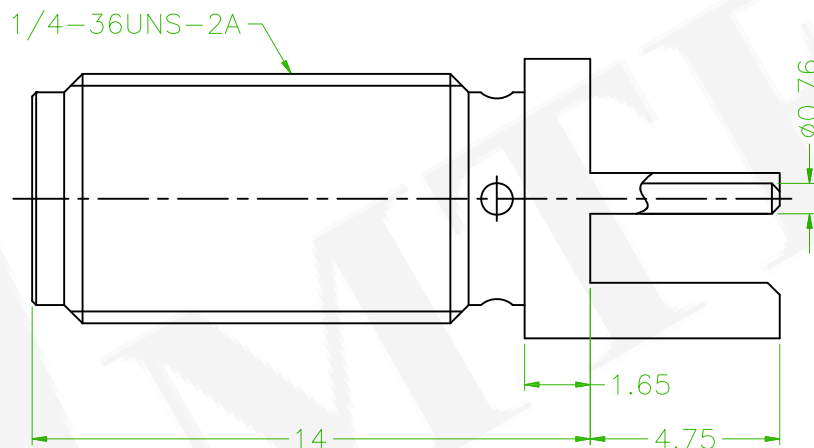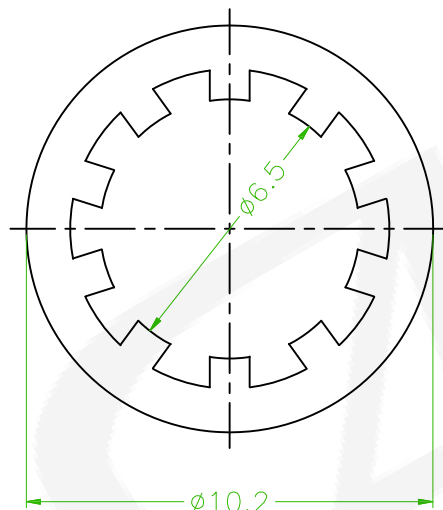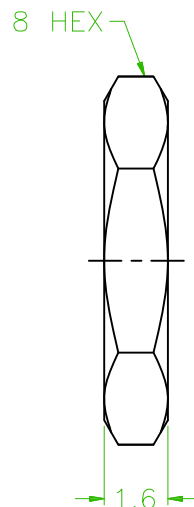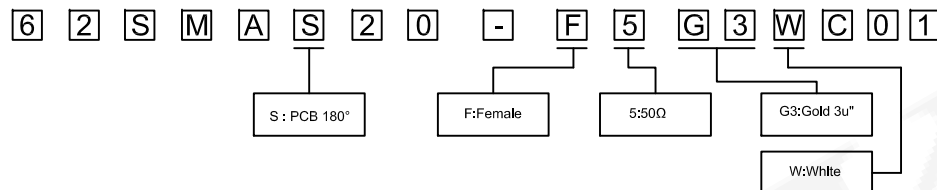

RECOMMENDED
MOUNTING HOLE

5	HEX NUT	NOTE 1	NOTE 2	1
4	LOCK WASHER	NOTE 1	NOTE 2	1
3	CONTACT PIN	NOTE 3	NOTE 4	1
2	INSULATOR	NOTE 5	NATURAL	1
1	BODY	NOTE 1	NOTE 2	1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY

ECN NO.:170541 Revise the Order Information.:62SMAD20-F5GWN1->62SMAS20-F5G3WC01	Mia	2017/08/22
Revise the drawing	Mia	2016/12/21
REV. ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	SMA CONN. SERIES				頁數 Page	1/1
	品號 PART NO.	62SMAS20-F5G3WC01				繪圖 DRAWN	Mia 2016/12/08
	圖號 DRAWING NO.	GW225-MC125		版本 REV.	C	核對 CHECKED	Jonny 2016/12/08
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/12/08
	公差 TOLERANCE	0.5-6 ±0.2 6-30 ±0.4 30-120 ±0.6	120-315 ±1 315-1000 ±1.6 1000-2000 ±2.4	單位 UNIT	mm	THIRD ANGLE PROJECTION	