


SPECIFICATIONS

DIELECTRIC STRENGTH: AC100V 50Hz/1MIN
RATING:DC 3V 10mA MAX
CONTACT RESISTANCE:500mΩ MAX
INSULATION RESISTANCE:50MΩ MIN
OPERATING LIFE:20,000 CYCLES
OPERATING FORCE:50gf±20gf

MATERIALS

BASE:PPA,BLACK
TERMINAL:BRASS,SILVER PLATED
CONTACT:PHOSPHOR BRONZE,SILVER PLATED
COVER:PPA,BLACK
ACTUATOR:POM,BLACK
SPRING:STAINLESS STEEL WIRE
SLIDER:POM,BLACK


ORDER INFORMATION

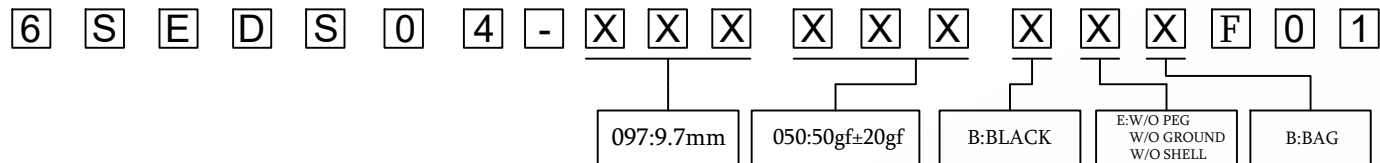


AMTEK 糧德

2025.11.11




Released DCC



CIRCUIT DIAGRAM



RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

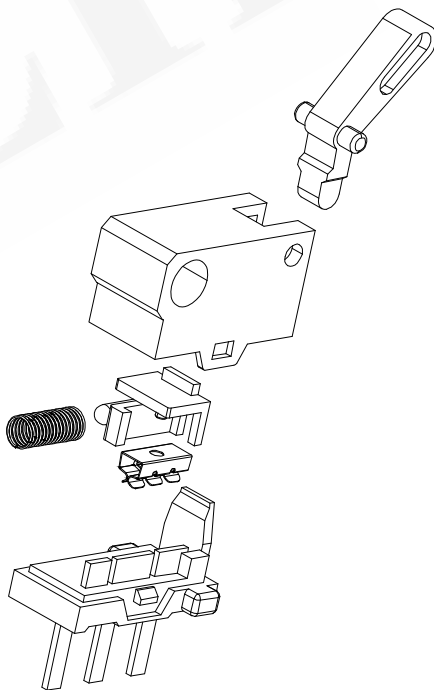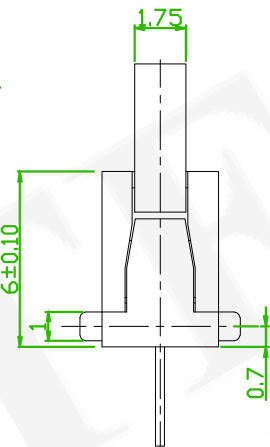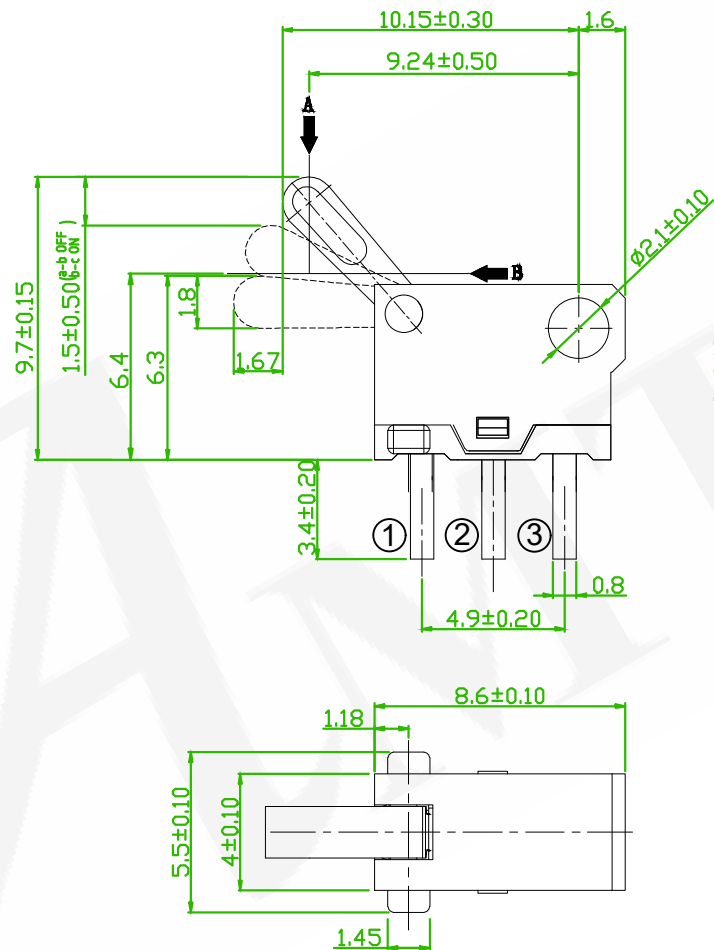

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△	REC2511000023	Oliver	2025/11/06
△	REC2507000047	Willy	2025/07/09
△	REC2507000008	Willy	2025/07/03

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	DETECTOR SWITCH DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	6SEDS04-XXXXXXXXXF01				繪圖 DRAWN	JOHN 2025/06/10
圖號 DRAWING NO.	GN219-JH368	版本 REV.	D	核對 CHECKED	JOSH 2025/06/10	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/10	
公差 TOLERANCE	.X ± 0.1 .XX ± 0.05	單位 UNIT	mm	第三 ANGLE PROJECTION		