


DIELECTRIC STRENGTH: AC100V/1MIN
RATING:DC 3V 10mA MAX
CONTACT RESISTANCE:500mΩ MAX
INSULATION RESISTANCE:50MΩ MIN
OPERATING LIFE:50,000 CYCLES
OPERATING FORCE:25gf±15gf




6 S E M R 0 2 - X X X X X X X F 0 1

Released DCC



BASE:PPA,BLACK
 TERMINAL:PHOSPHOR BRONZE,SILVER PLATED
 CONTACT:PHOSPHOR BRONZE,SILVER PLATED
 COVER:STAINLESS STEEL 
 ACTUATOR:PPA,BLACK



CIRCUIT DIAGRAM

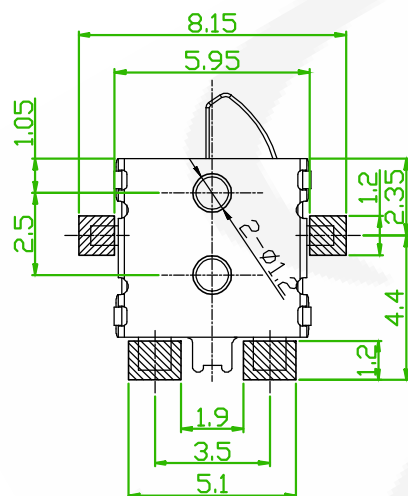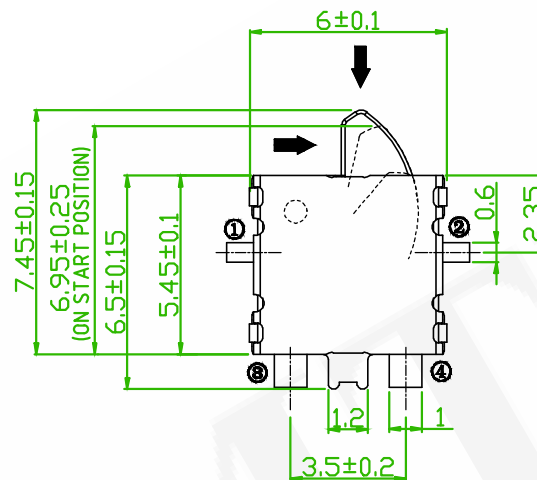

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

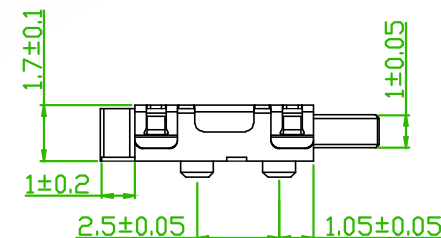

	REC2511000019	Oliver	2025/11/05
	REC2507000047	Willy	2025/07/09
	REC2507000008	Willy	2025/07/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	DETECTOR SWITCH SMT R/A TYPE				頁數 Page	1/1
品號 PART NO.	6SEMR02-XXXXXXXXXF01			繪圖 DRAWN	JOHN 2025/06/12	
圖號 DRAWING NO.	GN219-JH377	版本 REV.	D	核對 CHECKED	JOSH 2025/06/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/12	
公差 TOLERANCE	.X ± 0.1 .XX± 0.05	單位 UNIT	mm	THIRD ANGLE PROJECTION		