

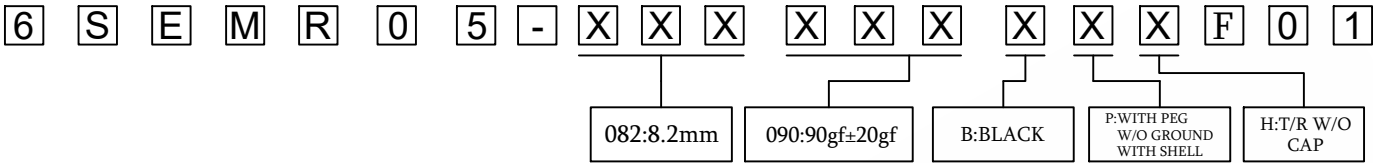
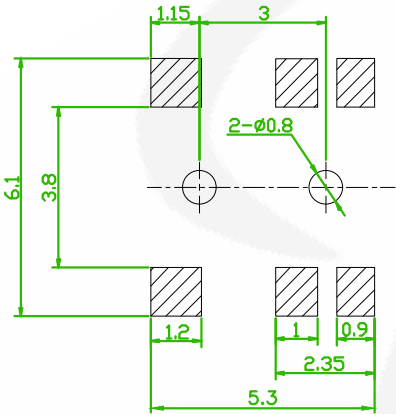


SPECIFICATIONS 
DIELECTRIC STRENGTH: AC100V 50Hz/1MIN
RATING:DC3V,10mA MAX
CONTACT RESISTANCE:500mΩ MAX
INSULATION RESISTANCE:50MΩ MIN
OPERATING LIFE:20,000 CYCLES
OPERATING FORCE:90gf±20gf



ORDER INFORMATION

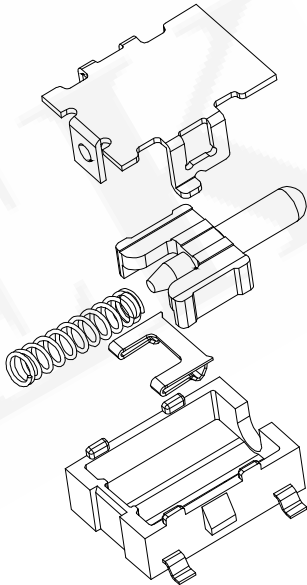

MATERIALS
BASE:NYLON 46,BLACK
TERMINAL:PHOSPHOR BRONZE,SILVER PLATED
CONTACT:PHOSPHOR BRONZE,SILVER PLATED
COVER:PHOSPHOR BRONZE,SILVER PLATED
ACTUATOR:NYLON 46,BLACK
SPRING:STAINLESS STEEL WIRE

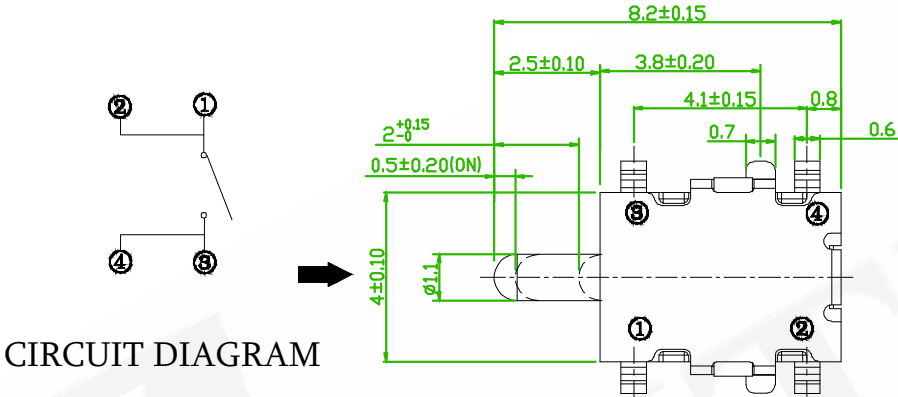

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

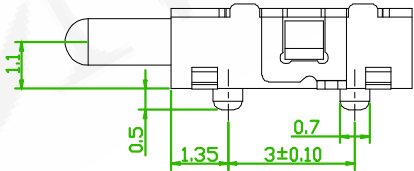

	REC2511000019	Oliver	2025/11/05
	REC2507000065	Willy	2025/07/10
	BPM 20250307003	John	2025/05/27
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	DETECTOR SWITCH SMT R/A TYPE				頁數 Page	1/1
	品號 PART NO.	6SEMR05-XXXXXXXXXF01				繪圖 DRAWN	JOHN 2025/06/12
	圖號 DRAWING NO.	GN219-JH375	版本 REV.	C	核對 CHECKED	JOSH 2025/06/12	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/12	
	公差 TOLERANCE	.X ± 0.1 .XX ± 0.05	單位 UNIT	mm	THIRD ANGLE PROJECTION		