



SPECIFICATIONS 
DIELECTRIC STRENGTH:250VAC 50Hz/1MIN
RATING:DC5V,10mA MAX
CONTACT RESISTANCE:1Ω MAX
INSULATION RESISTANCE:50MΩ MIN
OPERATING LIFE:50,000 CYCLES
OPERATING FORCE:30gf±15gf

MATERIALS
BASE:LCP,BLACK
TERMINAL:PHOSPHOR BRONZE,SILVER PLATED
COVER:STAINLESS STEEL
ACTUATOR:LCP,BLACK
SPRING:STAINLESS STEEL WIRE




ORDER INFORMATION

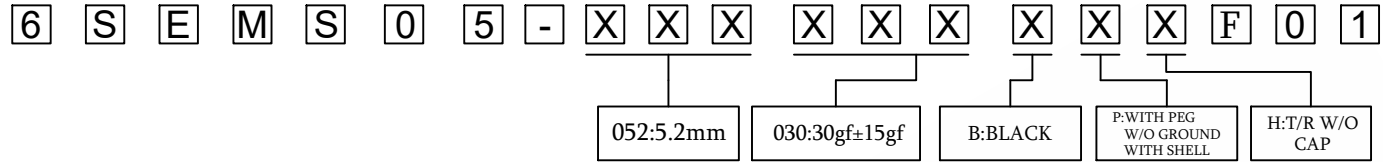

CIRCUIT DIAGRAM

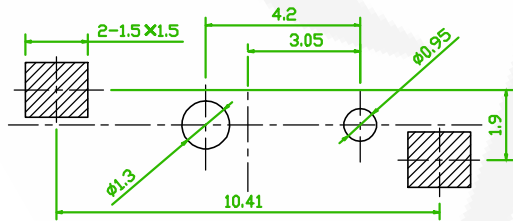

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

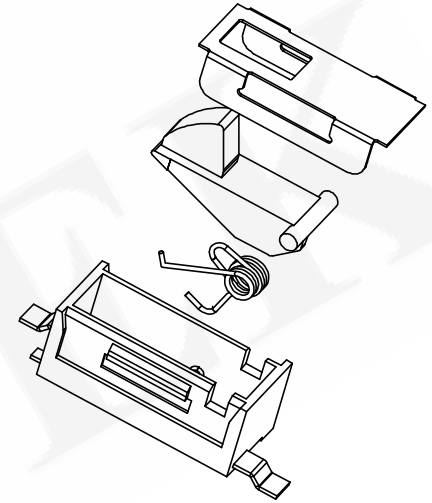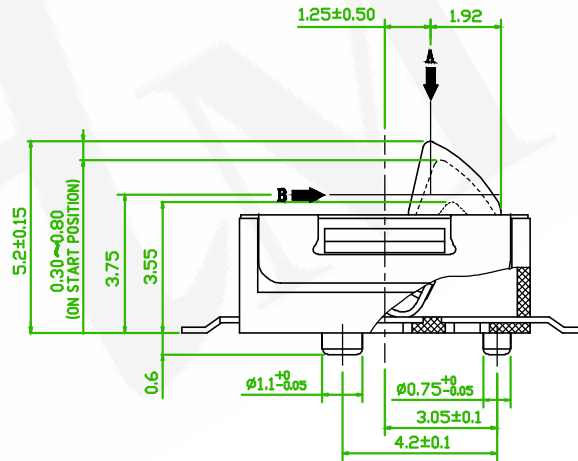

	REC�2511000017	Oliver	2025/11/05
	REC�2507000067	Willy	2025/07/11
	BPM 20250307003	John	2025/05/27
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	DETECTOR SWITCH SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	6SEMS05-XXXXXXXXF01				繪圖 DRAWN	JOHN 2025/06/11
圖號 DRAWING NO.	GN219-JH371	版本 REV.	C	核對 CHECKED	JOSH 2025/06/11	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/11	
公差 TOLERANCE	.X ± 0.1 .XX ± 0.05	單位 UNIT	mm	THIRD ANGLE PROJECTION		