



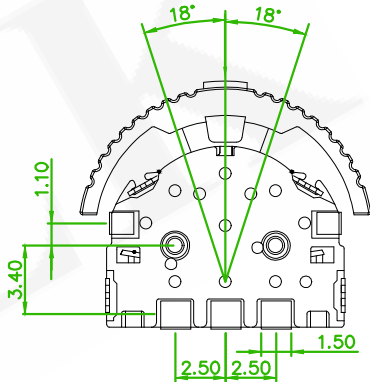

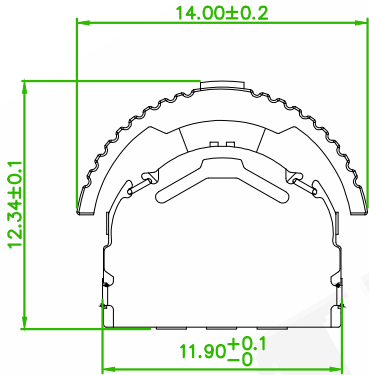


SPECIFICATIONS 
DIELECTRIC STRENGTH: 110VAC 50Hz/1 MIN
RATING:DC 12V,0.1A MAX
CONTACT RESISTANCE:100mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:100,000 CYCLES
OPERATING FORCE:80gf±50gf OR 205gf±50gf
TRAVEL:1.0±0.2mm
OPERATING TEMPERATURE:-10°C~+60°C

MATERIALS
BASE:NYLON 10T,BLACK
TERMINAL:BRASS,SILVER PLATED
CONTACT:PHOSPHOR BRONZE,SILVER PLATED
COVER:STAINLESS STEEL
ACTUATOR:NYLON 10T,BLACK
SPRING:STAINLESS STEEL WIRE 

ORDER INFORMATION

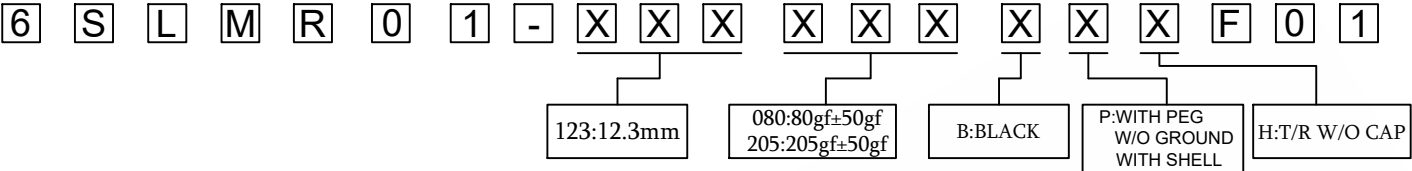

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

	REC�2511000029	Oliver	2025/11/07
	REC�2507000047	Willy	2025/07/09
	REC�2507000008	Willy	2025/07/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	LEVER & PUSH SWITCH SMT R/A TYPE				頁數 Page	1/1
品號 PART NO.	6SLMR01-XXXXXXXXXF01				繪圖 DRAWN	JOHN 2025/06/10
圖號 DRAWING NO.	GN219-JH351	版本 REV.	D	核對 CHECKED	JOSH 2025/06/10	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/10	
公差 TOLERANCE	.X ± 0.2 .XX ± 0.1	單位 UNIT	mm	THIRD ANGLE PROJECTION		