


SPECIFICATIONS


DIELECTRIC STRENGTH: AC500V (50-60Hz)/1MIN
RATING:DC12V,0.1A MAX
CONTACT RESISTANCE:100mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:10,000 CYCLES
OPERATING FORCE:230gf±80gf
OPERATING TEMPERATURE:-10°C~+60°C

ORDER INFORMATION

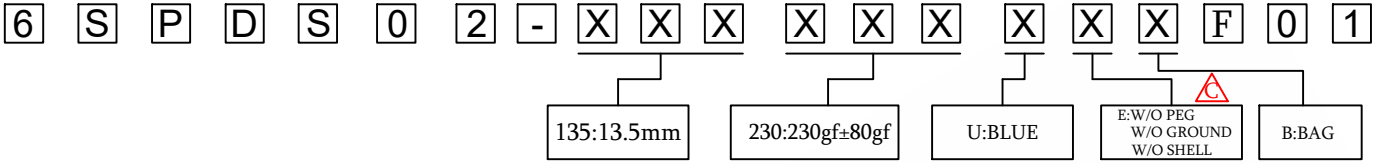


MATERIALS



BASE:PBT/BRASS,BLACK/SILVER PLATED
CONTACT:PHOSPHOR BRONZE,SILVER PLATED
COVER:POM,NATURAL
ACTUATOR:POM
CAM STICK:STAINLESS STEEL WIRE

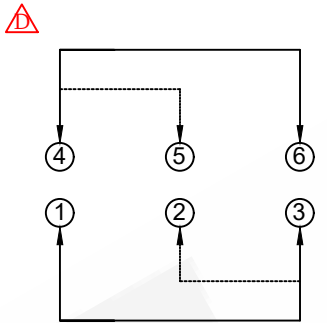

CIRCUIT DIAGRAM

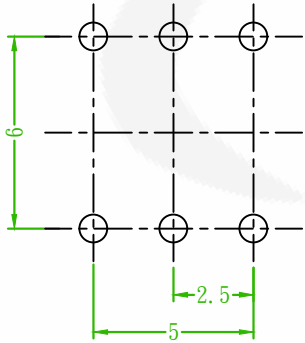

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

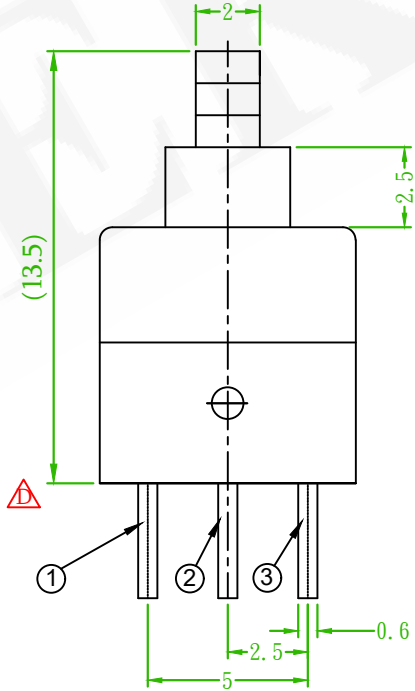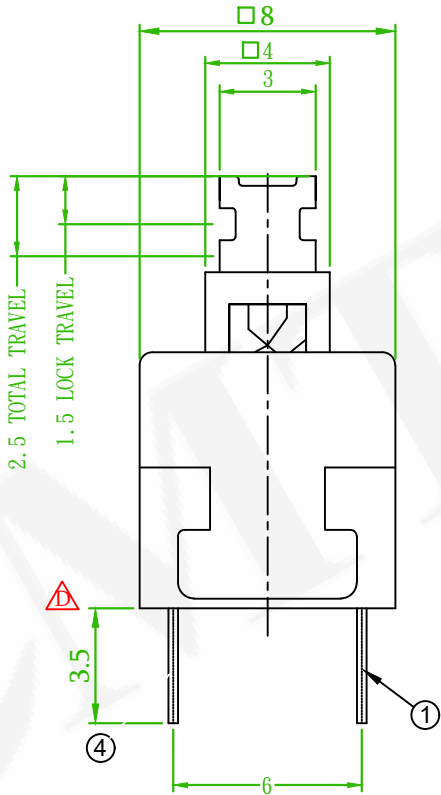

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△	REC2511000028	Oliver	2025/11/07
△	REC2507000148	Willy	2025/07/31
△	REC2507000109	Willy	2025/07/22

糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PUSH SWITCH DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	6SPDS02-XXXXXXXXXF01				繪圖 DRAWN	JOHN 2025/06/10
圖號 DRAWING NO.	GN219-JH346	版本 REV.	E	核對 CHECKED	JOSH 2025/06/10	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/10	
公差 TOLERANCE	.X ± 0.1 .XX ± 0.2	單位 UNIT	mm	第三 ANGLE PROJECTION		