

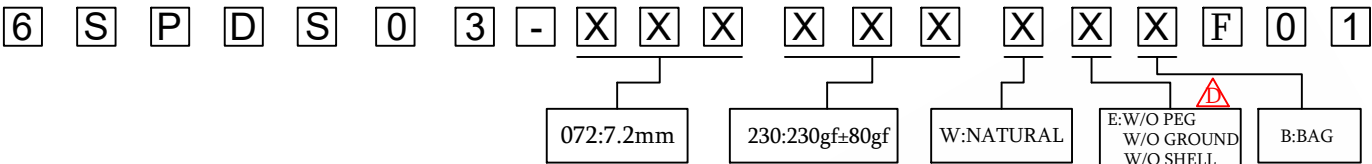


SPECIFICATIONS 
DIELECTRIC STRENGTH: 500VAC(50-60Hz)/1Min
RATING:DC 12V 0.1A MAX
CONTACT RESISTANCE:100mΩ MAX.
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:10,000 CYCLES
OPERATING FORCE:230gf±80gf
OPERATING TEMPERATURE:-10°C~+60°C



ORDER INFORMATION



MATERIALS
BASE:PPA+PHOSPHOR BRONZE,GRAY,SILVER PLATED
COVER:PPA,BLACK
ACTUATOR:PPA+PHOSPHOR BRONZE,NATURAL,SILVER PLATED
SPRING:STAINLESS STEEL WIRE
CAM STICK:STAINLESS STEEL WIRE

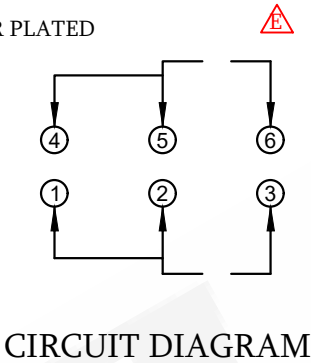

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

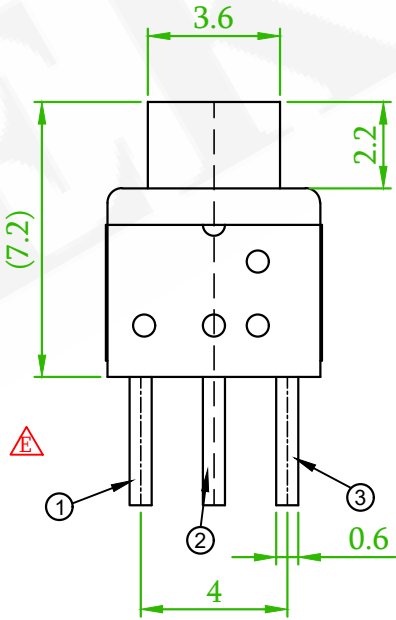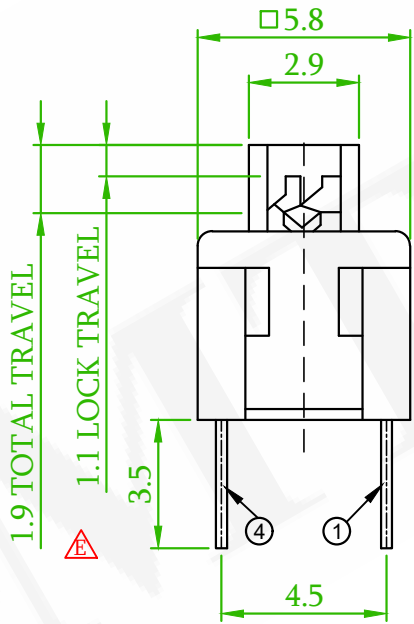

	REC�2511000028	Oliver	2025/11/07
	REC�2507000148	Willy	2025/07/31
	REC�2507000109	Willy	2025/07/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PUSH SWITCH DIP V/T TYPE				頁數 Page	1/1
	品號 PART NO.	6SPDS03-XXXXXXXXXF01				繪圖 DRAWN	JOHN 2025/06/10
	圖號 DRAWING NO.	GN219-JH347	版本 REV.	F	核對 CHECKED	JOSH 2025/06/10	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/10	
	公差 TOLERANCE	.X ± 0.1 .XX ± 0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		