


SPECIFICATIONS ⚠



DIELECTRIC STRENGTH: 500VAC(50-60HZ)/1Min
RATING:DC 50V 0.3A MAX
CONTACT RESISTANCE:100mΩ MAX.
INSULATION RESISTANCE:50MΩ MIN
OPERATING LIFE:10,000 CYCLES
OPERATING FORCE:280gf±50gf

ORDER INFORMATION


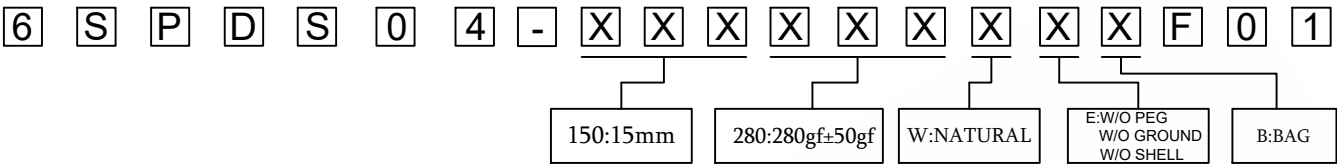


MATERIALS

BASE:NYLON 66,BLACK
TERMINAL:BRASS,SILVER PLATED
CONTACT CLIP:PHOSPHOR BRONZE,SILVER PLATED
COVER:NYLON 66,BLACK
ACTUATOR:NYLON 66,NATURAL
SPRING:STAINLESS STEEL ⚠
CAM STICK:STAINLESS STEEL



RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

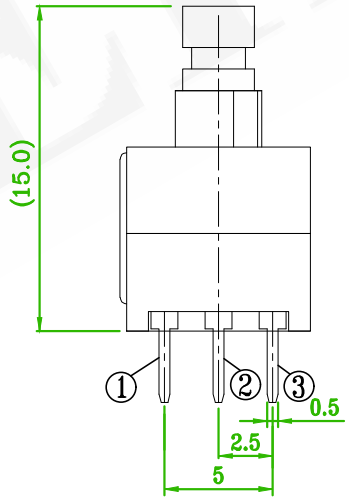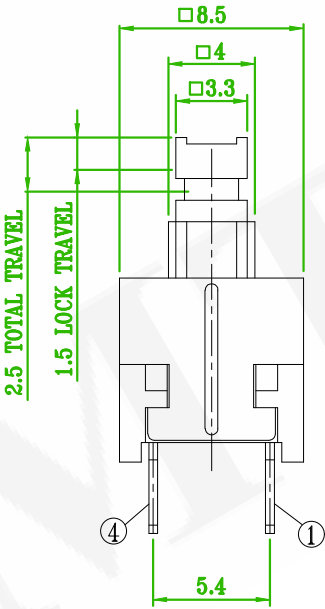

⚠	REC2511000029	Oliver	2025/11/07
⚠	REC2507000048	Willy	2025/07/09
⚠	REC2507000006	Willy	2025/07/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PUSH SWITCH DIP V/T TYPE				頁數 Page	1/1
	品號 PART NO.	6SPDS04-XXXXXXXXXF01				繪圖 DRAWN	JOHN 2025/06/10
	圖號 DRAWING NO.	GN219-JH348	版本 REV.	D	核對 CHECKED	JOSH 2025/06/10	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/10	
	公差 TOLERANCE	.X ± 0.2 .XX ± 0.3	單位 UNIT	mm	THIRD ANGLE PROJECTION		