


SPECIFICATIONS

DIELECTRIC STRENGTH: AC250V(50Hz OR 60Hz) /1MIN
RATING:SWITCHING: 150mA,42VDC
NON-SWITCHING: 200mA,42VDC
CONTACT RESISTANCE: 80mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN
OPERATING LIFE:10,000 CYCLES
OPERATING FORCE: 700gf MAX
OPERATING TEMPERATURE: -40°C~+85°C

MATERIALS

BASE:NYLON 9T
TERMINAL:PHOSPHOR BRONZE,TIN PLATED
CONTACT:PHOSPHOR BRONZE,GOLD PLATED
COVER:NYLON 9T
ACTUATOR:NYLON 9T
SPRING:STAINLESS STEEL
O-RING:SILICONE
GUIDE:STAINLESS STEEL

ORDER INFORMATION

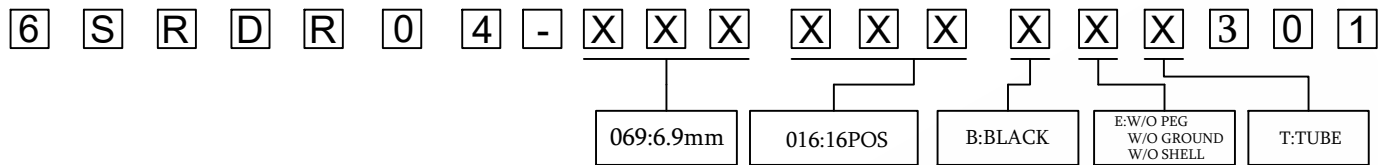


AMTEK 糧德


2025.11.11

Released DCC

16 Position	Real Code					
	C	1	2	4	8	
	0	●				0
	1	●	●			1
	2	●		●		2
	3	●	●	●		3
	4	●			●	4
	5	●	●		●	5
	6	●		●		6
	7	●	●	●		7
	8	●			●	8
	9	●	●		●	9
	10	●		●		A
	11	●	●		●	B
	12	●			●	C
	13	●	●		●	D
	14	●		●	●	E
	15	●	●	●	●	F

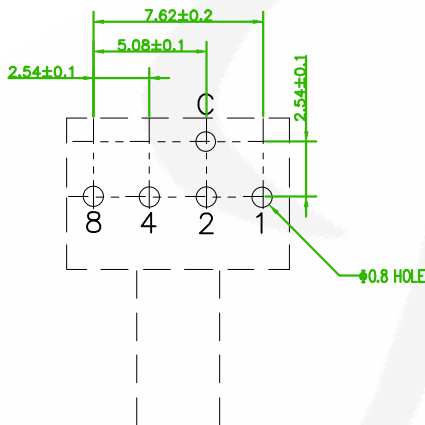

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

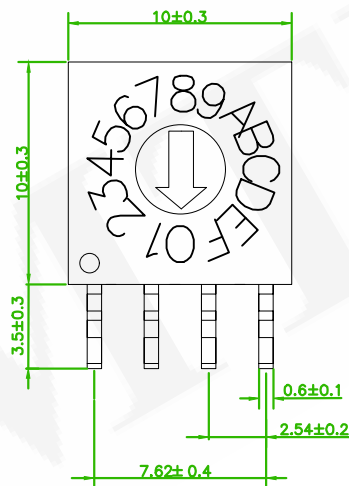

E	REC2511000026	Oliver	2025/11/07
D	REC2507000088	Willy	2025/07/16
C	REC2507000060	Willy	2025/07/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	ROTARY CODE SWITCH DIP R/A TYPE				頁數 Page	1/1
	品號 PART NO.	6SRDR04-XXXXXXXX301				繪圖 DRAWN	JOHN 2025/06/17
	圖號 DRAWING NO.	GN258-JH421	版本 REV.	E	核對 CHECKED	JOSH 2025/06/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/17	
	公差 TOLERANCE	± 0.3	單位 UNIT	mm	THIRD ANGLE PROJECTION		