







SPECIFICATIONS 
DIELECTRIC STRENGTH: AC250V(50Hz OR 60Hz) /1MIN
RATING:SWITCHING: 150mA,42VDC
NON-SWITCHING: 200mA,42VDC
CONTACT RESISTANCE: 80mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN
OPERATING LIFE:10,000 CYCLES
OPERATING FORCE: 700gf MAX
OPERATING TEMPERATURE: -40°C~+85°C

MATERIALS
ACTUATOR:NYLON 9T
TERMINAL:PHOSPHOR BRONZE,TIN PLATED 
CONTACT:PHOSPHOR BRONZE,GOLD PLATED
COVER:NYLON 9T
BASE:NYLON 9T
O-RING:SILICONE
SPRING:STAINLESS STEEL
GUIDE:STAINLESS STEEL

ORDER INFORMATION

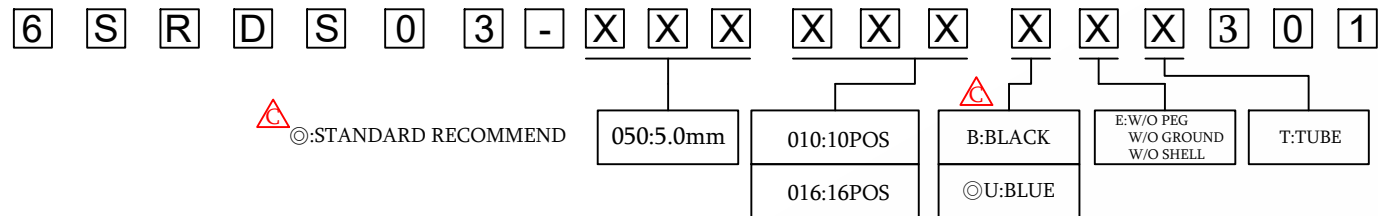

		Real Code				
		C	1	2	4	8
16 Position 10 Position	0	●				0
	1	●				1
	2	●				2
	3	●				3
	4	●				4
	5	●				5
	6	●				6
	7	●				7
	8	●				8
	9	●				9
	10	●				A
	11	●				B
	12	●				C
	13	●				D
	14	●				E
	15	●				F

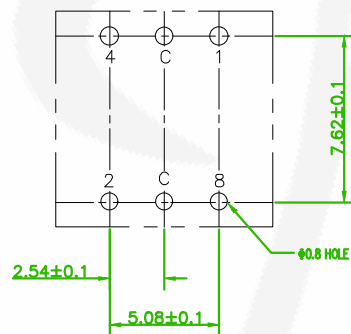

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

	REC2507000088	Willy	2025/07/16
	BPM 20250715004	Gaby	2025/07/16
	REC2507000063	Willy	2025/07/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		ROTARY CODE SWITCH DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.		6SRDS03-XXXXXXXXX301		繪圖 DRAWN	JOHN	2025/06/17	
圖號 DRAWING NO.		GN258-JH425	版本 REV.	D	核對 CHECKED	JOSH 2025/06/17	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	JOSH 2025/06/17	
公差 TOLERANCE		± 0.3	單位 UNIT	mm	THIRD ANGLE PROJECTION		