

RATING:SWITCHING: 150mA,42VDC

CONTACT RESISTANCE: 80mΩ MAX

INSULATION RESISTANCE: 100MΩ MIN

OPERATING LIFE: 25000 CYCLES

OPERATING FORCE: 700gf MAX

OPERATING TEMPERATURE:-55°C~+125°C

BASE:LCP

TERMINAL:PHOSPHOR BRONZE,GOLD PLATED


CONTACT:PHOSPHOR BRONZE,GOLD PLATED

COVER:STAINLESS STEEL

ACTUATOR:LCP

O-RING:SILICONE


6 S R M S 0 2 - X X X X X X X X X X 3 0 1

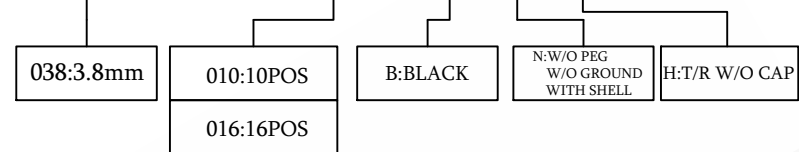



2025.11.11

Released DCC




		Complement Code						
		C	7	2	4	8		
16 Position	10 Position	0	●	●	●	●	●	0
	1	●			●	●	●	1
	2	●	●					2
	3	●				●	●	3
	4	●	●				●	4
	5	●		●		●		5
	6	●	●			●		6
	7	●				●		7
	8	●	●	●	●			8
	9	●		●	●			9
	10	●	●					A
	11	●			●			B
	12	●	●	●				C
	13	●		●				D
	14	●	●					E
	15	●						F




RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

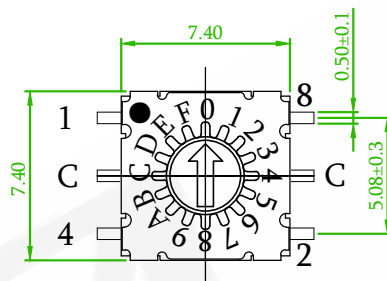

6SRMS02-038016XXX301

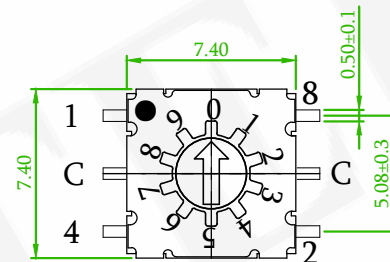

6SRMS02-038010XX301



	REC2511000025	Oliver	2025/11/06
	REC2507000056	Willy	2025/07/10
	BPM 20250516011	John	2025/06/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	ROTARY CODE SWITCH SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	6SRMS02-XXXXXXXXX301			繪圖 DRAWN	JOHN 2025/06/17	
圖號 DRAWING NO.	GN258-JH427	版本 REV.	C	核對 CHECKED	JOSH 2025/06/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/17	
公差 TOLERANCE	± 0.3	單位 UNIT	mm	THIRD ANGLE PROJECTION		