

SPECIFICATIONS

DIELECTRIC STRENGTH: AC250V 50Hz/1MIN
RATING:DC6V,0.3A MAX
CONTACT RESISTANCE:200mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:10,000 CYCLES
OPERATING FORCE:160gf±10gf
TRAVEL:2.0±0.2mm

MATERIALS

BASE:LCP, BLACK
TERMINAL:BRASS, SILVER PLATED
CONTACT:BERYLLIUM COPPER, SILVER PLATED
COVER:STAINLESS STEEL
ACTUATOR:PPA

ORDER INFORMATION


6SSDR02-XXXXXXF01

055:5.5mm020:2.0mmB:BLACKN:W/O PEGW/O GROUNDWITH SHELLB:BAG


AMTEK 糧德

2025.11.11




Released DCC



CIRCUIT DIAGRAM



RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

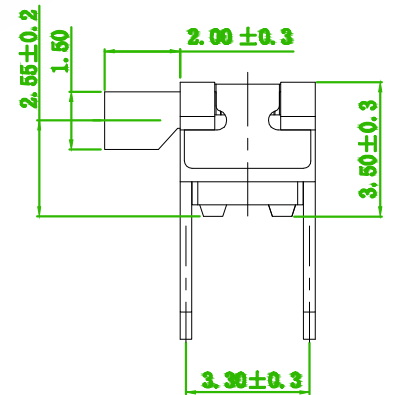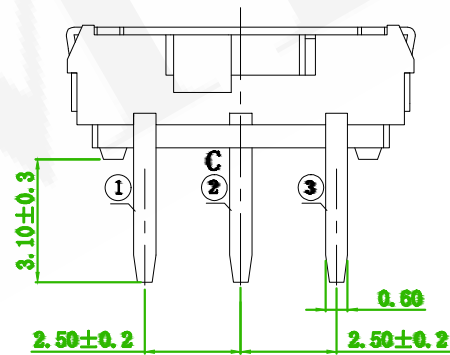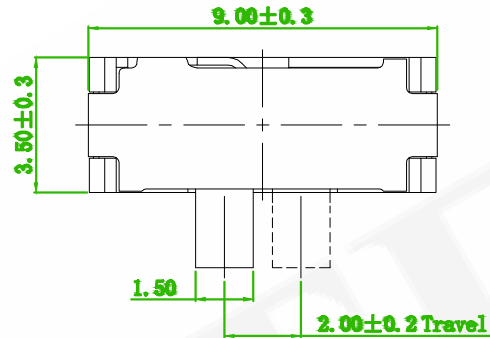

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	REC2511000012	Oliver	2025/11/04
B	REC2507000063	Willy	2025/07/10
A	BPM 20250307003	John	2025/06/17

Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SLIDE SWITCH DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	6SSDR02-XXXXXXXXF01			繪圖 DRAWN	JOHN 2025/06/17	
圖號 DRAWING NO.	GN219-JH417	版本 REV.	C	核對 CHECKED	JOSH 2025/06/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/17	
公差 TOLERANCE	5<L≤10 ±0.3 L≤5 ±0.2	單位 UNIT	mm	第三 ANGLE PROJECTION		