



SPECIFICATIONS 
DIELECTRIC STRENGTH: AC250V (50-60Hz)/1MIN
RATING:DC12V,50mA MAX
CONTACT RESISTANCE:50mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:10,000 CYCLES
OPERATING FORCE:180gf±50gf
TRAVEL:2.0±0.2mm
OPERATING TEMPERATURE:-25°C~+70°C





ORDER INFORMATION

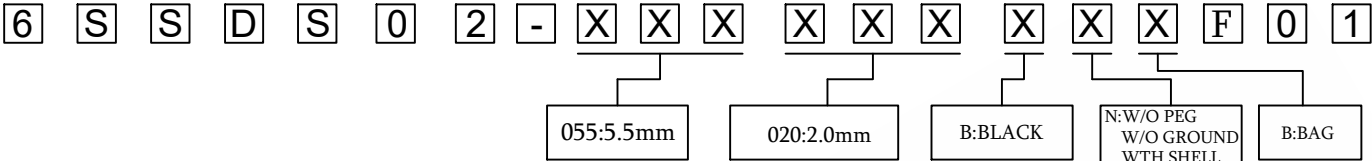

MATERIALS
BASE:NYLON46,BLACK
TERMINAL:BRASS,SILVER PLATED
CONTACT:PHOSPHOR BRONZE,SILVER PLATED
COVER:STAINLESS STEEL
ACTUATOR:NYLON46



CIRCUIT DIAGRAM

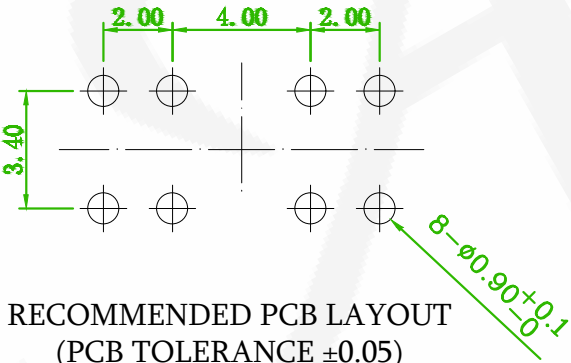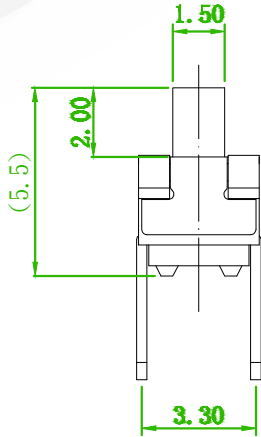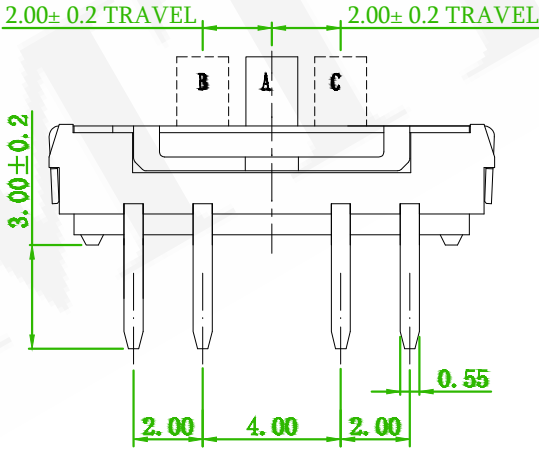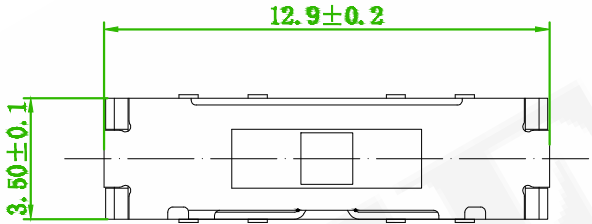

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

	REC2511000011	Oliver	2025/11/04
	REC2507000068	Willy	2025/07/11
	BPM 20250307003	John	2025/05/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		SLIDE SWITCH DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.		6SSDS02-XXXXXXXXF01				繪圖 DRAWN	JOHN 2025/06/10
圖號 DRAWING NO.		GN219-JH355	版本 REV.	C	核對 CHECKED	JOSH 2025/06/10	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	JOSH 2025/06/10	
公差 TOLERANCE		.X ± 0.1 .XX ± 0.05	單位 UNIT	mm	THIRD ANGLE PROJECTION		