





SPECIFICATIONS ⚠️⚠️
DIELECTRIC STRENGTH: AC250V 50Hz/1MIN
RATING:DC12V,50mA MAX
CONTACT RESISTANCE:70mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:10,000 CYCLES
OPERATING FORCE:180gf±50gf
TRAVEL:1.5±0.2mm
OPERATING TEMPERATURE:-30°C~+85°C

MATERIALS
BASE:LCP,BLACK
TERMINAL:PHOSPHOR BRONZE,SILVER PLATED
CONTACT:BERYLLIUM COPPER,SILVER PLATED
COVER:PHOSPHOR BRONZE,SILVER PLATED
ACTUATOR:NYLON 46,NATURAL
SPRING:STAINLESS STEEL



ORDER INFORMATION

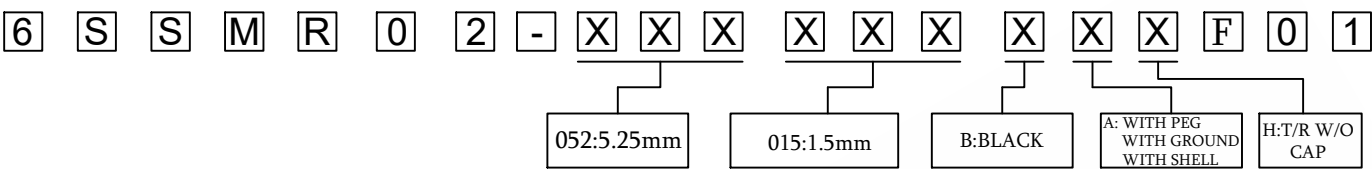

CIRCUIT DIAGRAM

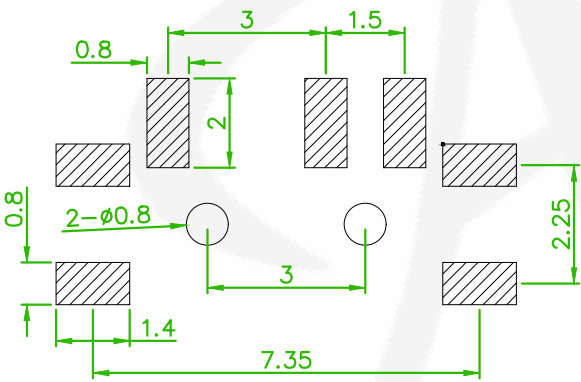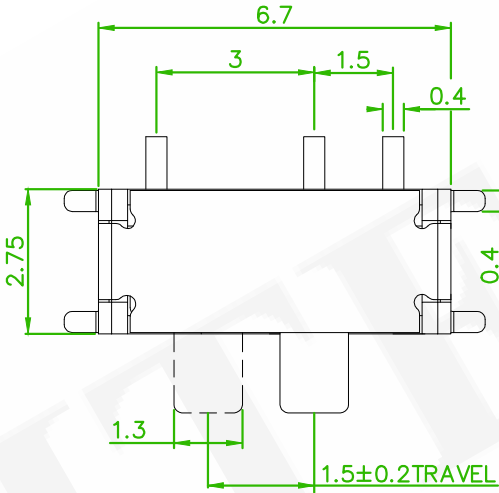

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

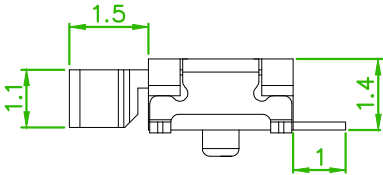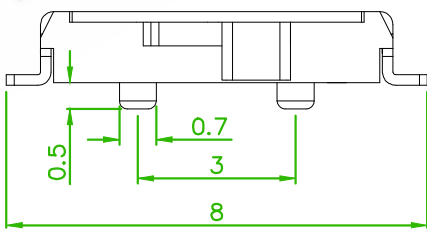

⚠️	REC2511000011	Oliver	2025/11/04
⚠️	REC2507000048	Willy	2025/07/09
⚠️	REC2507000004	Willy	2025/07/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	SLIDE SWITCH SMT R/A TYPE				頁數 Page	1/1
品號 PART NO.	6SSMR02-XXXXXXXXXF01				繪圖 DRAWN	JOHN 2025/06/10
圖號 DRAWING NO.	GN219-JH357	版本 REV.	E	核對 CHECKED	JOSH 2025/06/10	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/10	
公差 TOLERANCE	X. ±0.3 .X±0.2 .XX±0.1	單位 UNIT	mm	第三 ANGLE PROJECTION		