

SPECIFICATIONS ⚠

DIELECTRIC STRENGTH: AC110V 50Hz/1MIN
RATING:DC12V,50mA MAX
CONTACT RESISTANCE:80mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:10,000 CYCLES
OPERATING FORCE:200gf±50gf
TRAVEL:1.5±0.1mm
OPERATING TEMPERATURE:-10°C~+60°C

MATERIALS

BASE:LCP,BLACK
TERMINAL:BRASS,SILVER PLATED
CONTACT:BERYLLIUM COPPER,SILVER PLATED
COVER:STAINLESS STEEL
ACTUATOR:PPA

ORDER INFORMATION

6

S

S

M

S

0

3

-

X

X

X

X

X

X

X

F

0

1

⚠



035:3.5mm

015:1.5mm




B:BLACK

P:WITH PEG
W/O GROUND
WITH SHELL

H:T/R W/O CAP

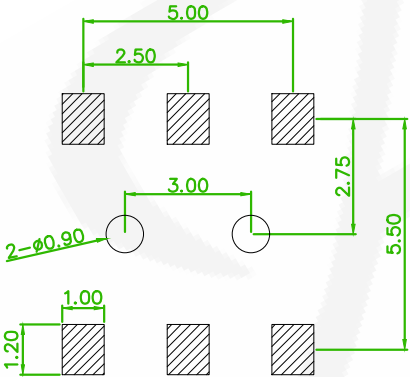

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

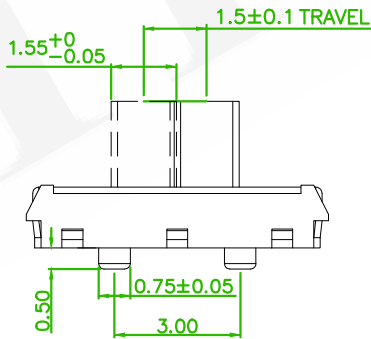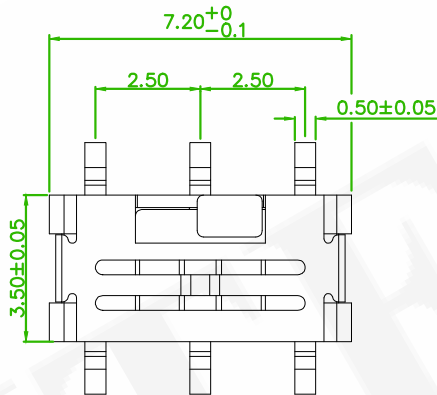

⚠	REC�2511000009	Oliver	2025/11/04
⚠	REC�2507000063	Willy	2025/07/10
⚠	BPM 20250307003	John	2025/06/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		SLIDE SWITCH SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.		6SSMS03-XXXXXXXXXF01				繪圖 DRAWN	JOHN 2025/06/10
圖號 DRAWING NO.		GN219-JH363	版本 REV.	D	核對 CHECKED	JOSH 2025/06/10	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	JOSH 2025/06/10	
公差 TOLERANCE		.X ± 0.2 .XX ± 0.1	單位 UNIT	mm	THIRD ANGLE PROJECTION		