


SPECIFICATIONS ⚠


DIELECTRIC STRENGTH: AC250V 50Hz/1MIN
 RATING:DC12V,50mA MAX
 CONTACT RESISTANCE:70mΩ MAX
 INSULATION RESISTANCE:100MΩ MIN
 OPERATING LIFE:10,000 CYCLES
 OPERATING FORCE:200gf±50gf
 TRAVEL:2.0±0.1mm
 OPERATING TEMPERATURE:-25°C~+70°C

ORDER INFORMATION


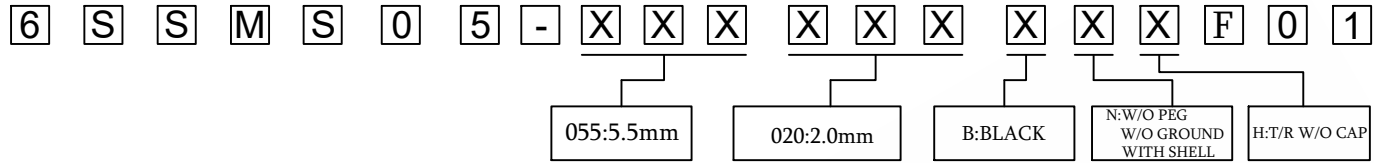


MATERIALS



BASE:LCP, BLACK
 TERMINAL:BRASS, SILVER PLATED
 ACTUATOR:PPA
 CONTACT:BERYLLIUM COPPER, SILVER PLATED
 COVER:STAINLESS STEEL



CIRCUIT DIAGRAM

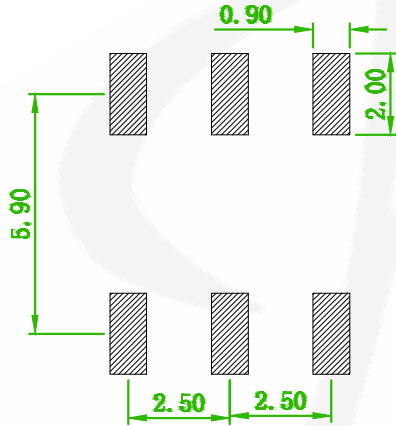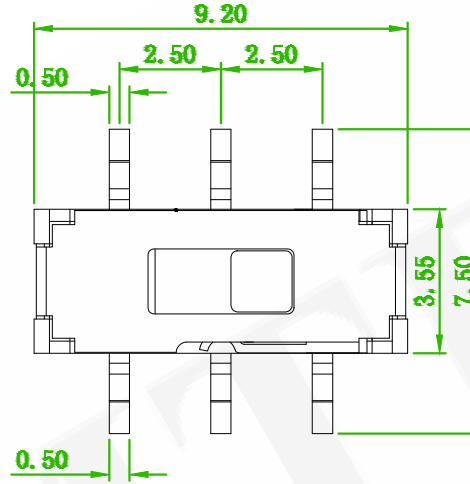

RECOMMENDED PCB LAYOUT
 (PCB TOLERANCE ±0.05)

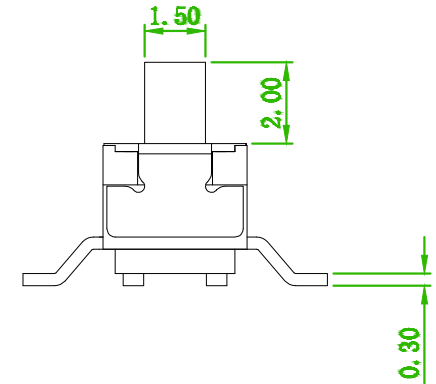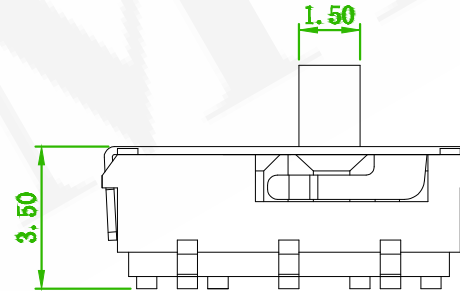

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
⚠	REC2507000068	Willy	2025/07/11
⚠	BPM 20250307003	John	2025/05/13

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	SLIDE SWITCH SMT V/T TYPE			頁數 Page	1/1
	品號 PART NO.	6SSMS05-XXXXXXXXF01			繪圖 DRAWN	JOHN 2025/06/10
	圖號 DRAWING NO.	GN219-JH365	版本 REV.	B	核對 CHECKED	JOSH 2025/06/10
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/10
	公差 TOLERANCE	.X ± 0.15 .XX ± 0.1	單位 UNIT	mm	THIRD ANGLE PROJECTION	