

SPECIFICATIONS 
DIELECTRIC STRENGTH: AC250V /1MIN
RATING:DC12V,50mA MAX
CONTACT RESISTANCE:100mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:100,000 CYCLES
OPERATING FORCE:180gf±50gf OR 250gf±50gf 


ORDER INFORMATION

6 S T M R 0 1 - X X X X X X X X A 0 1




034:3.4mm	 180:180gf±50gf 250:250gf±50gf	 W:NATURAL B:BLACK	A:WITH PEG WITH GROUND WITH SHELL	H:T/R W/O CAP
-----------	--	--	---	---------------





MATERIALS
BASE:LCP,BLACK
TERMINAL:PHOSPHOR BRONZE,SILVER PLATED
CONTACT:STAINLESS STEEL,SILVER PLATED
COVER:PHOSPHOR BRONZE,SILVER PLATED
ACTUATOR:LCP



CIRCUIT DIAGRAM

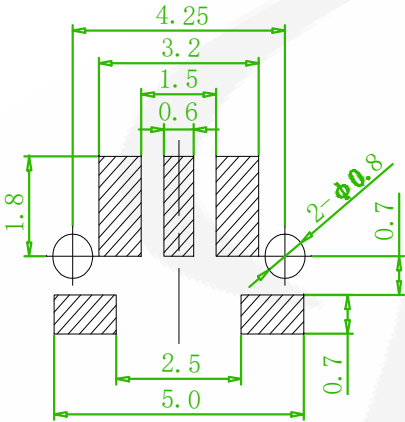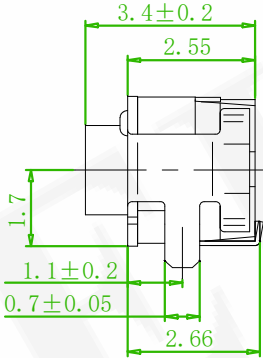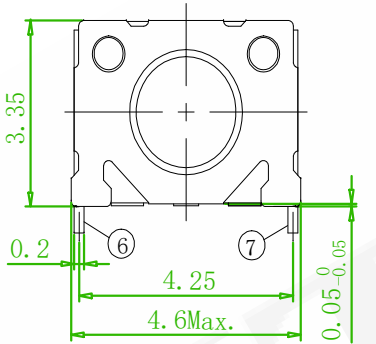

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

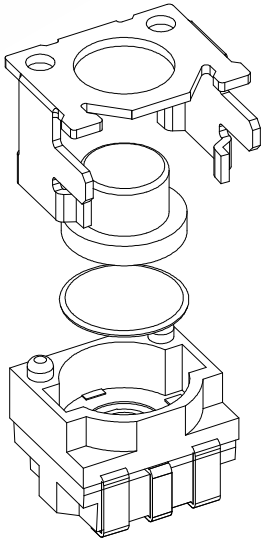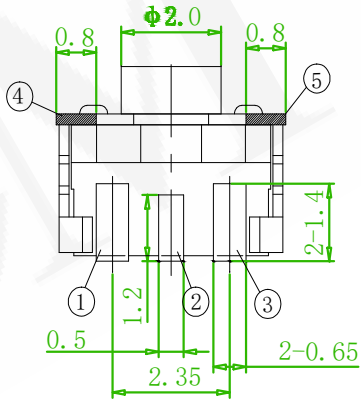

	REC2507000038	Willy	2025/07/08
	BPM 20250613001	John	2025/06/27
	BPM 20250108003	John	2025/04/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



懋德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TACT SWITCH SMT R/A TYPE				頁數 Page	1/1
品號 PART NO.	6STMR01-XXXXXXXXXA01				繪圖 DRAWN	JOHN 2025/06/12
圖號 DRAWING NO.	GN162-JH384	版本 REV.	C	核對 CHECKED	JOSH 2025/06/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/12	
公差 TOLERANCE	4<L≤16 ±0.3 L≤4 ±0.2	單位 UNIT	mm	第三 ANGLE PROJECTION		