



SPECIFICATIONS 
DIELECTRIC STRENGTH: AC250V /1MIN
RATING:DC15V,20mA MAX
CONTACT RESISTANCE:100mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:300,000 CYCLES
OPERATING FORCE:180gf±50gf





ORDER INFORMATION

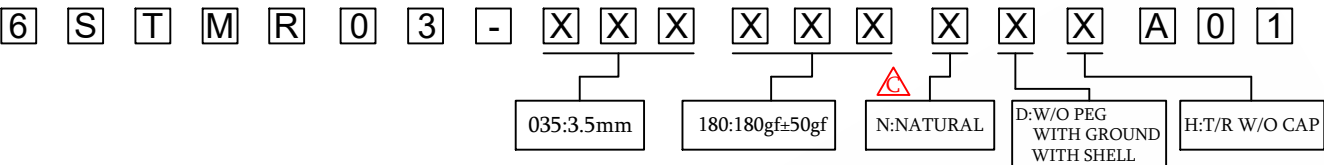

MATERIALS
BASE:LCP
TERMINAL:PHOSPHOR BRONZE,SILVER PLATED
CONTACT:STAINLESS STEEL,SILVER PLATED
COVER:STAINLESS STEEL,Tin PLATED
ACTUATOR:LCP



CIRCUIT DIAGRAM

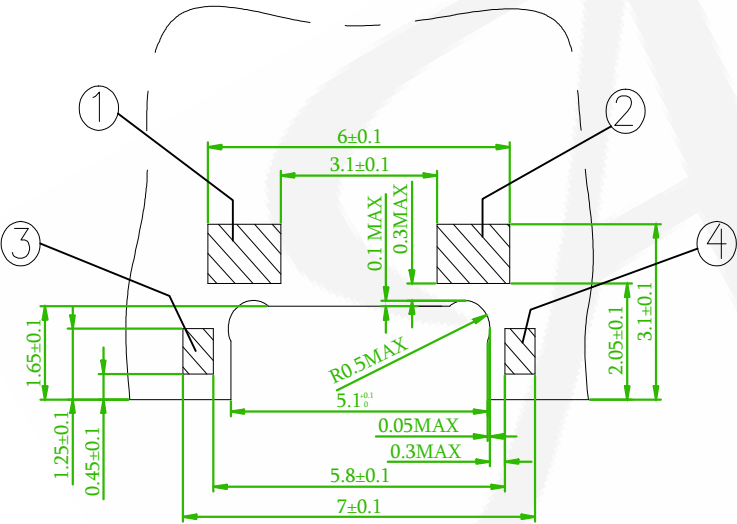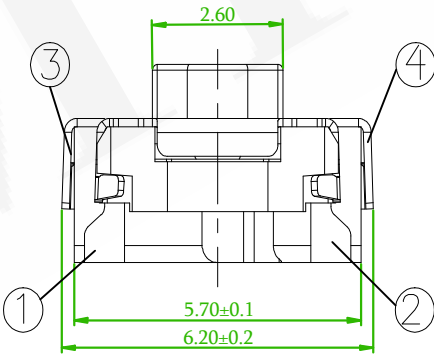

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

	REC2507000113	Willy	2025/07/25
	REC2507000039	Willy	2025/07/07
	BPM 20250108003	John	2025/04/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TACT SWITCH SMT R/A TYPE				頁數 Page	1/1
	品號 PART NO.	6STMR03-XXXXXXXXXA01				繪圖 DRAWN	JOHN 2025/06/12
	圖號 DRAWING NO.	GN162-JH386	版本 REV.	C	核對 CHECKED	JOSH 2025/06/12	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/12	
	公差 TOLERANCE	4<L≤16 ±0.3 L≤4 ±0.2	單位 UNIT	mm	第三 ANGLE PROJECTION		