

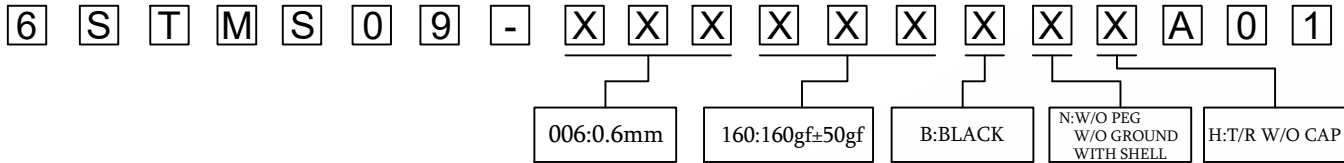


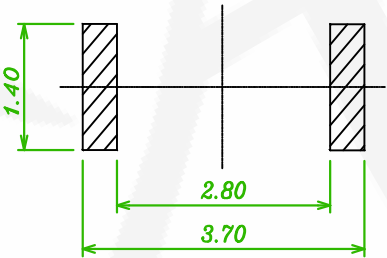
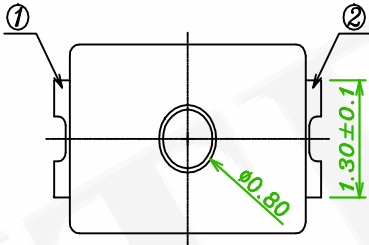


SPECIFICATIONS 
DIELECTRIC STRENGTH: AC250V /1MIN
RATING:DC12V,100mA MAX
CONTACT RESISTANCE:500mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:300,000 CYCLES
OPERATING FORCE:160gf±50gf

ORDER INFORMATION



MATERIALS
BASE:PA6T
TERMINAL:PHOSPHOR BRONZE,SILVER PLATED
CONTACT:STAINLESS STEEL,SILVER PLATED
ACTUATOR:POLYAMIDE

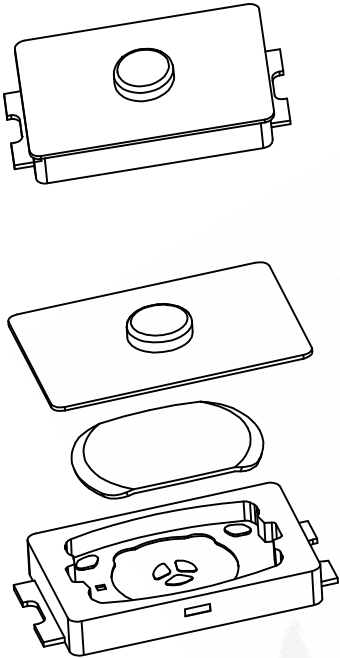

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

	REC2510000103	Olive	2025/10/31
	REC2507000038	Willy	2025/07/08
	BPM 20250108003	John	2025/06/04
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TACT SWITCH SMT V/T TYPE				頁數 Page	1/1
	品號 PART NO.	6STMS09-XXXXXXXXXA01				繪圖 DRAWN	JOHN 2025/06/13
	圖號 DRAWING NO.	GN162-JH399	版本 REV.	C	核對 CHECKED	JOSH 2025/06/13	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/13	
	公差 TOLERANCE	4<L≤16 ±0.3 L≤4 ±0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		