







SPECIFICATIONS ⚠

DIELECTRIC STRENGTH: AC250V /1MIN
RATING:DC12V,50mA MAX
CONTACT RESISTANCE:100mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:200,000 CYCLES
OPERATING FORCE:160gf±50gf OR 250gf±50gf

MATERIALS

BASE:LCP
TERMINAL:PHOSPHOR BRONZE,SILVER PLATED
CONTACT:STAINLESS STEEL,SILVER PLATED
COVER:STAINLESS STEEL
ACTUATOR:LCP
TAPE SEALED:PI

ORDER INFORMATION

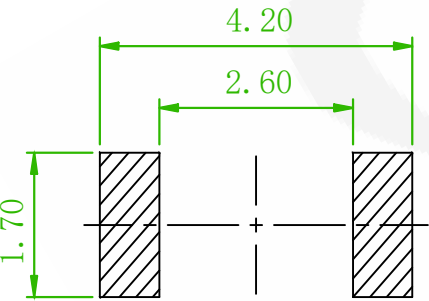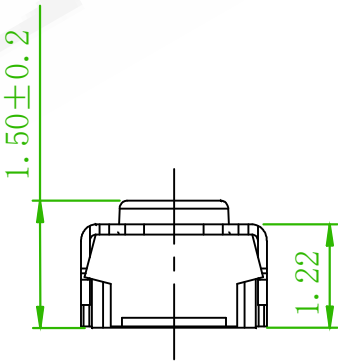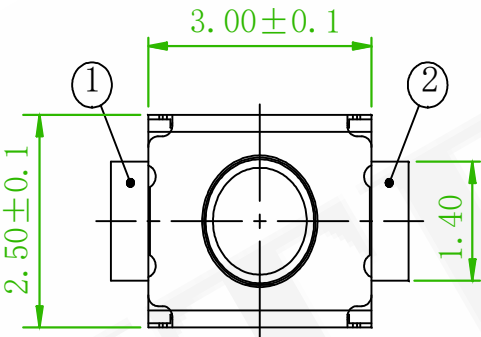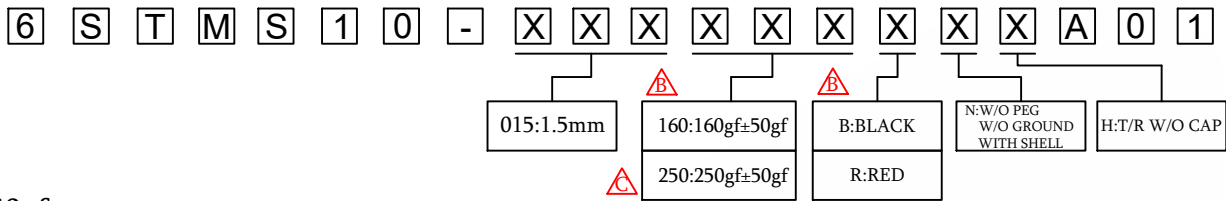

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

⚠	REC2510000103	Oliver	2025/10/31
⚠	RECR2507000885	Alice	2025/07/09
⚠	BPM 20250613001	John	2025/06/27
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TACT SWITCH SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	6STMS10-XXXXXXXXXA01			繪圖 DRAWN	JOHN 2025/06/13	
圖號 DRAWING NO.	GN162-JH400	版本 REV.	D	核對 CHECKED	JOSH 2025/06/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/13	
公差 TOLERANCE	16<X≤63 ±0.4 4<X≤16 ±0.3 X≤4 ±0.2			單位 UNIT	mm	THIRD ANGLE PROJECTION