

SPECIFICATIONS ⚠
DIELECTRIC STRENGTH: AC250V /1MIN
RATING:DC12V,50mA MAX
CONTACT RESISTANCE:100mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:300,000 CYCLES
OPERATING FORCE:160gf±30gf OR 250gf±50gf OR 300gf±70gf

MATERIALS
BASE:LCP
TERMINAL:PHOSPHOR BRONZE,SILVER PLATED
CONTACT:STAINLESS STEE,SILVER PLATED
TAPE SEALED:PI

ORDER INFORMATION

6

S

T

M

S

1

4

-

X

X

X

X

X

X

X

X

A

0

1

005:0.55mm

⚠

160:160gf±30gf

250:250gf±50gf



300:300gf±70gf

⚠



Z:METAL

N:W/O PEG
W/O GROUND
WITH SHELL

H:T/R W/O CAP

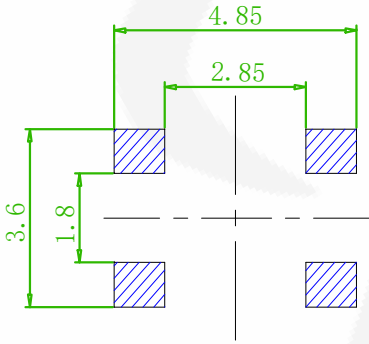

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

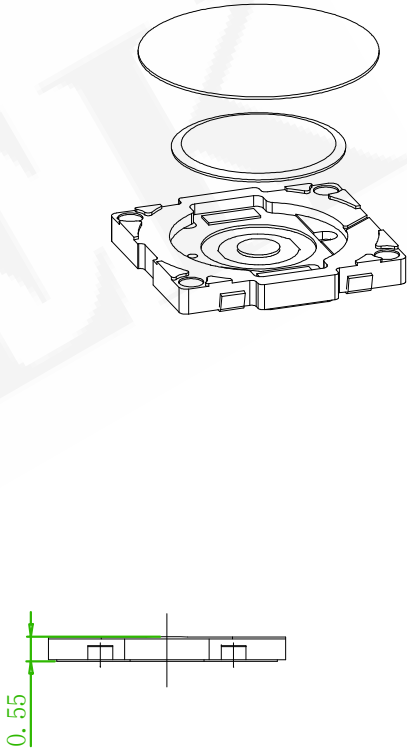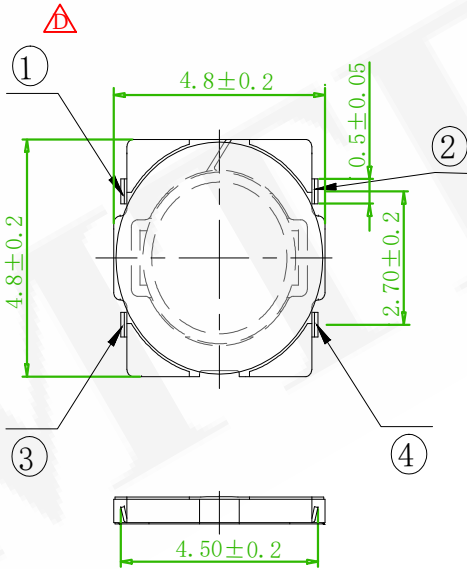

⚠	REC2510000103	Oliver	2025/10/31
⚠	REC2507000148	Willy	2025/07/31
⚠	REC2507000037	Willy	2025/07/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TACT SWITCH SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	6STMS14-XXXXXXXXXA01				繪圖 DRAWN	JOHN 2025/06/13
圖號 DRAWING NO.	GN162-JH404	版本 REV.	E	核對 CHECKED	JOSH 2025/06/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2025/06/13	
公差 TOLERANCE	4<L≤16 ±0.3 L≤4 ±0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		