

SPECIFICATIONS ⚠

DIELECTRIC STRENGTH: AC250V /1MIN
RATING:DC12V,50mA MAX
CONTACT RESISTANCE:100mΩ MAX
INSULATION RESISTANCE:100MΩ MIN
OPERATING LIFE:500,000 CYCLES
OPERATING FORCE:100gf±30gf OR 180gf±50gf OR 250gf±50gf ⚠


MATERIALS

BASE:NYLON 6T
TERMINAL:BRASS,SILVER PLATED
CONTACT:STAINLESS STEEL,SILVER PLATED
COVER:STAINLESS STEEL
ACTUATOR:PPA

ORDER INFORMATION

6 S T M S 1 8 - X X X X X X X X A 0 1


⚠	025:H=2.5mm	⚠	100:100gf±30gf	⚠	B:BLACK	N:W/O PEG W/O GROUND WITH SHELL	H:T/R W/O CAP
	031:H=3.1mm		180:180gf±50gf		R:RED		
	035:H=3.5mm		250:250gf±50gf				





CIRCUIT DIAGRAM



P/N	H	STEM COLOR
6STMS18-025XXXXBXXA01	2.5mm	BLACK
6STMS18-025XXXXRXXA01		RED
6STMS18-031XXXXBXXA01	3.1mm	BLACK
6STMS18-035XXXXBXXA01	3.5mm	BLACK

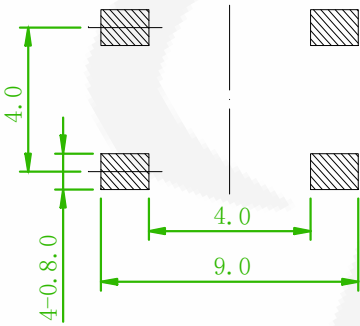

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

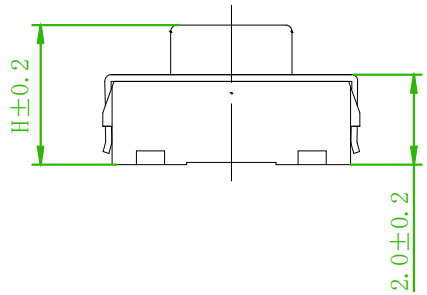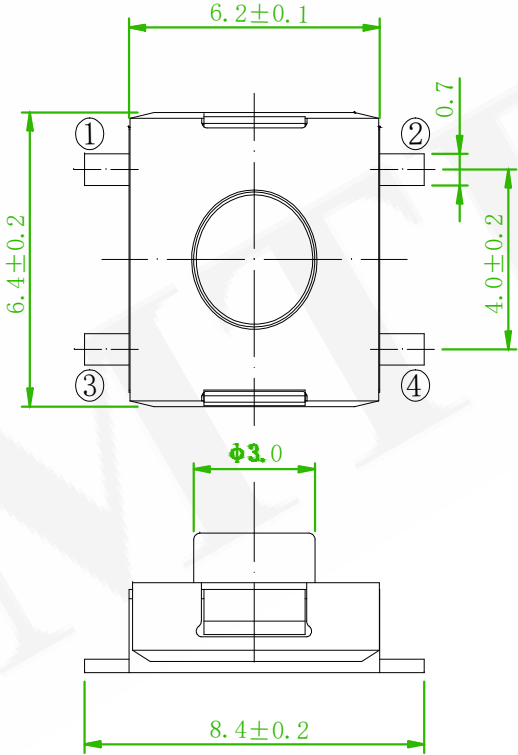

⚠	REC2510000094	Oliver	2025/10/30
⚠	REC2507000041	Willy	2025/07/08
⚠	BPM 20250613001	Willy	2025/06/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



韋德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		TACT SWITCH SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.		6STMS18-XXXXXXXXXA01		繪圖 DRAWN	JOHN	2025/06/16	
圖號 DRAWING NO.		GN162-JH408	版本 REV.	D	核對 CHECKED	JOSH	2025/06/16
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	JOSH	2025/06/16
公差 TOLERANCE		4<L≤16 ±0.3 L≤4 ±0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		