

ELECTRICAL
RATED VOLTAGE: 36V
RATED CURRENT: 30A
INSULATION RESISTANCE: 500MΩ / DC 500V
WIRE RANGE: 22-14AWG
DIELECTRIC VOLTAGE: AC 1500V FOR ONE MINUTE

MECHANICAL
TEMP. RANGE: -40°C ~ +105°C
TORQUE:0.5Nm

MATERIAL
HOUSING: NYLON 66, UL94V-0
SCREWS: M3 STEEL IMITATION GOLD PLATED
PIN HEADER: COPPER ALLOY IMITATION GOLD PLATED

ORDER INFORMATION

5

T

B

0

8

8

R

-

E

M

4

N

X

X

X

L

X

-

W

1

088

PITCH:8.8mm

SERIES No.



No. OF POLES TOTAL

(03~04P)

B:BLACK

B:BAG

A:TRAY

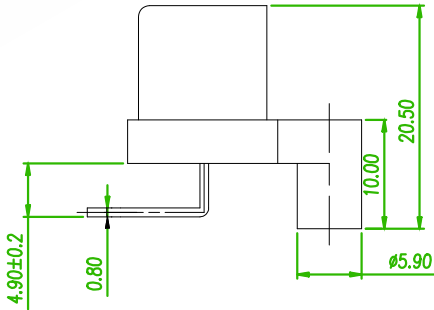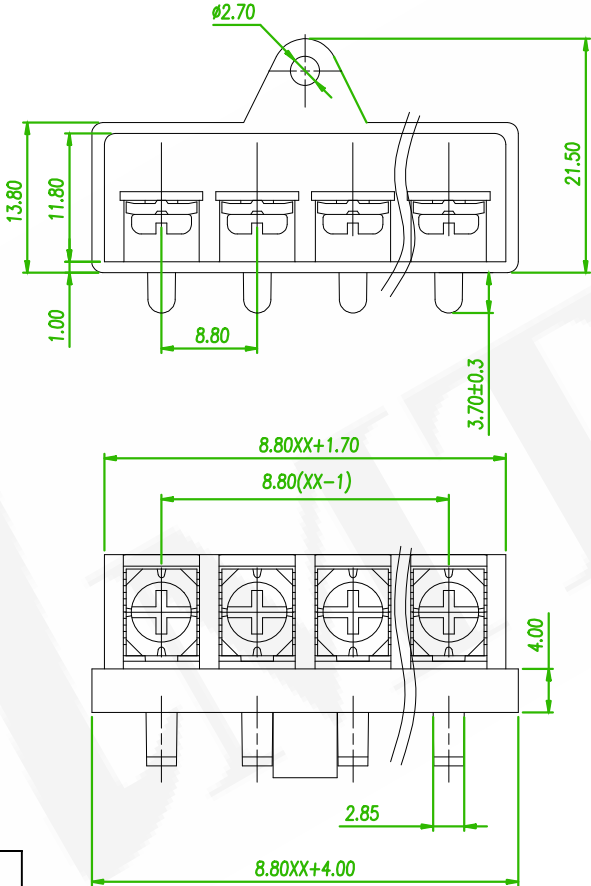

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO:240348 Revise the draing	Gaby	2025/02/17
△x2	ECN NO:201211 Revise the PART NO.	Alice	2020/12/31
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/11/06
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		TERMINAL BLOCK BARRIER 8. 8mm				頁數 Page	1/1
品號 PART NO.		5TB088R-EM4NXXXLX-W1				繪圖 DRAWN	ROY 2018/12/27
圖號 DRAWING NO.		GN011-R1079	版本 REV.	D	核對 CHECKED	JOSH 2018/12/27	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	JASON 2018/12/27	
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION		