

MATERIAL

HOUSING: PBT, UL94V-0
SCREWS: M4 STEEL,NI PLATED,TORQUE:1.8N.m

SPECIFICATION

OPERATING TEMPERATURE: -40°C~130°C
SOLDERING TEMPERATURE: 260°C/5SEC
CONTACT RESISTANCE: 20mΩ
INSULATION RESISTANCE: 1000MΩ/DC500V


TECHNICAL DATA

UL/CUL

RATED VOLTAGE (V)	300
RATED CURRENT (A)	30
WITHSTANDING VOLTAGE	1600V (1MIN)
WIRE RANGE	22-10
SOLID/STRANDED (AWG)	

ORDER INFORMATION

5	T	B	1	1	0	N	-	J	1	0	E	X	X	X	L	X	-	0	1
110: PITCH11.0mm						SERIES NO.			POLES (02~15)			B:BLACK			B:BAG				

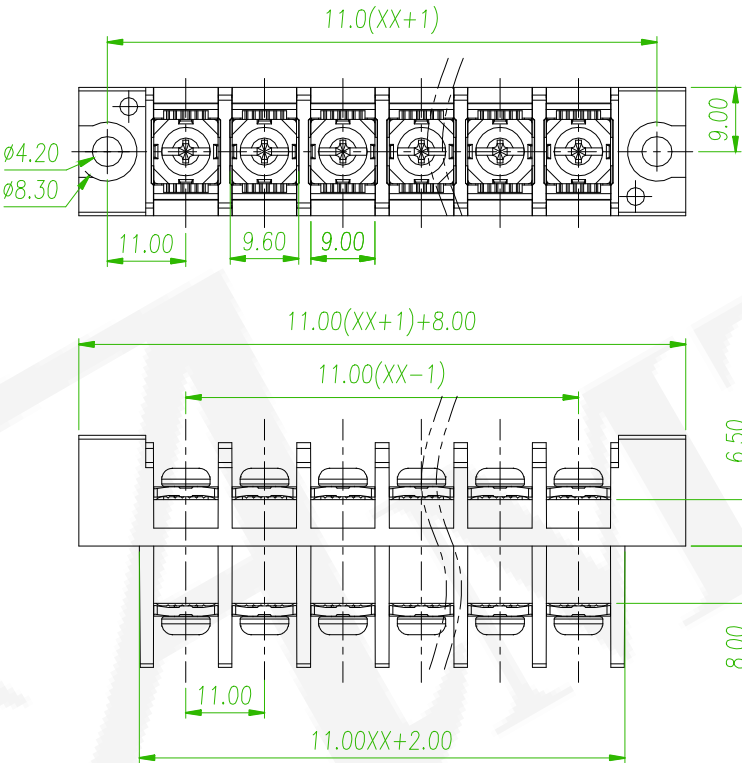

AMTEK 糧德

2024.06.27

Released DCC

General Tolerances

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	EasyFlow No.:202401240001	Randy	2024/05/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK 糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	TERMINAL BLOCK BARRIER 11.0mm				頁數 Page	1/1
品號 PART NO.	5TB110N-J10EXXXLX-01				繪圖 DRAWN	Randy 2024/05/20
圖號 DRAWING NO.	GN011-RD497	版本 REV.	A	核對 CHECKED	Josh 2024/05/20	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/05/20	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		