
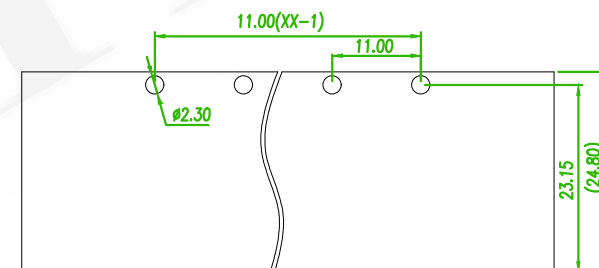
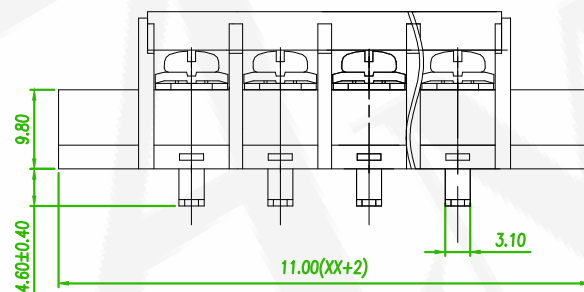


GDIELECTRIC VOLTAGE: AC 1600V FOR ONE MINUTE

B:BAG
A:TRAY

MAX SOLDERING: +260°C, FOR 5 SEC

COVER:PC,UL94V-2



RECOMMENDED PCB LAOUT
(PCB TOLERANCE ± 0.05)

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TERMINAL BLOCK BARRIER 11.0mm DIP R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5TB110R-68MEXXXLX-W1			繪圖 DRAWN	Roy 2019/01/08	
	圖號 DRAWING NO.	GN011-R1131	版本 REV.	E	核對 CHECKED	Josh 2019/01/08	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2019/01/08	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		