

MATERIAL

HOUSING: PA66, UL94V-0
SCREWS: M4 STEEL,GOLD PLATED,TORQUE:1.2N.m
PIN:COPPER ALLOY,GOLD PLATED

SPECIFICATION

OPERATING TEMPERATURE: -40°C~105°C
SOLDERING TEMPERATURE: 260°C/5SEC
CONTACT RESISTANCE: 20mΩ
INSULATION RESISTANCE: 500MΩ/DC500V

TECHNICAL DATA

UL/CUL

RATED VOLTAGE (V)	150
RATED CURRENT (A)	30
WITHSTANDING VOLTAGE	2000V (1MIN)
WIRE RANGE	22-10
SOLID/STRANDED (AWG)	


ORDER INFORMATION

5	T	B	1	1	0	R	-	M	2	1	E	X	X	X	L	X	-	0	1
110: PITCH11.0mm						SERIES NO.			NO OF PINS TOTAL(06-08P)			B:BLACK			B:BAG				

AMTEK糧德

2024.06.24

Released DCC

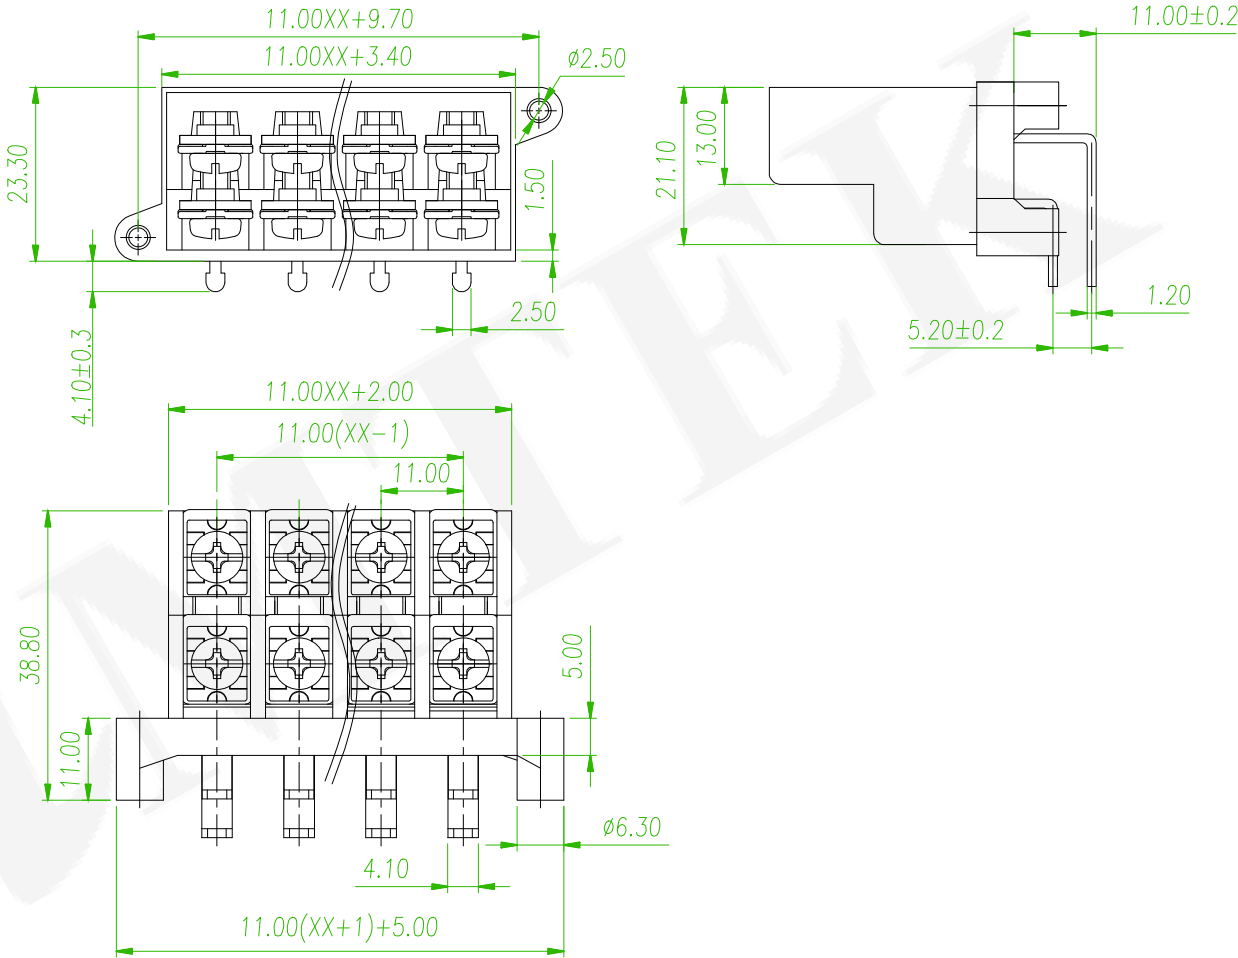

General Tolerances

								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	EasyFlow No.:202401240001	Randy	2024/05/21
	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TERMINAL BLOCK BARRIER 11.0mm DIP R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5TB110R-M21EXXXLX-01				繪圖 DRAWN	Randy 2024/05/21
	圖號 DRAWING NO.	GN011-RD511	版本 REV.	A	核對 CHECKED	Josh 2024/05/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2024/05/21	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		